



Art.-Nr: AMWA509CC Exit sign Centralised power supply systems Wall construction flag, CoreCompact 24 (CC), CPS, 22 m, IP40, Zinc die-cast, white

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall. Thanks to the wall bracket, the escape and emergency routes are identified at right angles to the wall. This can be done on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



 ϵ

More information www.rp-group.com/en/item/AMWA509CC



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Wall construction flag
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Standby circuit / permanent circuit
Input voltageAC	24 V







Power max.	2,8 W				
Power maintained	2,8 W				
Power non-maintained	0,4 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	80 mm				
Width	334 mm				
Height	196 mm				
Weight	1.41				
Weight incl. packaging	1.77				
Connection cross-section	2.5 mm²				
Switching input	No				
Emergency light blocking	No				
Battery connection	No				
Luminous flux mains	165 lm				
Luminous flux emergency	165 lm				
Customs tariff number	94056180				
EAN	4260682156549				





TECHNICAL DRAWING

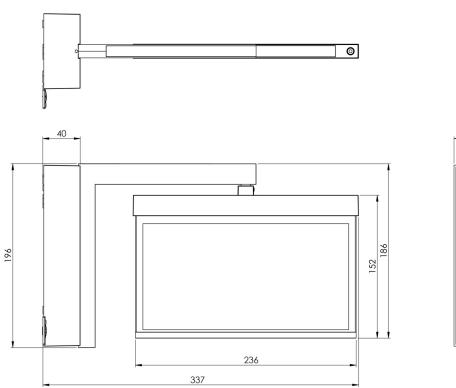

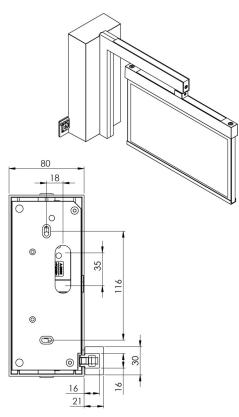

ACCESSORY LIST

AM-X-APA - Surface-mounted adapter AM/AX





RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AMWA009ML	□	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
AMWA009ML- AZ	□ →	Central power supply (ML)	Central power supply	RAL 7016	€€€	Yes	low	Yes	1,920 per system	central
AMWA009ML-	∅ →	Central power supply (ML)	Central power supply	Edelstahl	€€€	Yes	low	Yes	1,920 per system	central
AMWA509CC- AZ	₹ →	CoreCompact 24 (CC)	Central power supply	RAL 7016	€€	Yes	low	Yes		central
AMWA509CC- E	□	CoreCompact 24 (CC)	Central power supply	Edelstahl	€€	Yes	low	Yes		central

As of: 31.01.2025 - Subject to technical changes and errors.