



Art.-Nr: ASMU003 Exit sign Self-contained Universal, Without monitoring, 3 h, 22 m, IP40, Aluminium, Anodised aluminium

Multi-functional aluminium emergency exit sign luminaire for universal mounting. As a result of the clever structure, the recesses for cable entry and fastening are integrated, both for ceiling and wall mounting. Visually appealing side parts cover the lock mechanism so that the luminaire conveys a harmonious and fully closed impression.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



CE

More information www.rp-group.com/en/item/ASMU003



TECHNICAL DATA


Luminaire type	Exit sign				
Mounting	Universal				
Recognition distance	22 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Aluminium				
Housing color	Anodised aluminium				
Protection type (IP)	IP40				
Impact resistance (IK)	3				
Certification	WEEE, CE				
Insulation class	1				
Supply	Self-contained				
Monitoring	Without monitoring				
Bridging time	3 h				
Battery	NIMH 4,8 V/0,5 Ah				
Operating mode	Non-maintained / maintained				
Input voltageAC	230 V				
Input frequency	50 Hz				






Input voltage DC	- V				
Power max.	3,1 W				
Power maintained	3,1 W				
Power non-maintained	1,4 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	54 mm				
Width	277 mm				
Height	184 mm				
Weight	0.9				
Weight incl. packaging	1.07				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	No				
Battery connection	Connector				
Dimming function	No				
Customs tariff number	94056180				
EAN	4260349828246				

TECHNICAL DRAWING



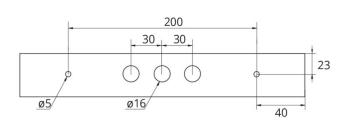

ACCESSORY LIST

DSA - Wire suspension

2PS-EB - Pendant





RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
ASMU003SC	₹ } →	SelfControl (SC)	Single battery	Alu eloxiert	€	no	high	no	unlimited	itself
ASMU003-WS	(+)	Without monitoring		RAL 9003						
ASMU003SC- WS	1	SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself

As of: 14.05.2025 - Subject to technical changes and errors.