



## Exit sign

**Art.-No.: ASMU011WB-WS**

ASMU is an innovative aluminium multifunctional edge luminaire for universal mounting (wall/ceiling). It is suited for maintained and non-maintained mode. It's easy to install and has variably useable pictograms to increase planning security. Pictogram set (left, right, straight up and down, blind) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.




## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Viewing distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Aluminium / PMMA
Colour	RAL 9003
Mechanical rating IP	40
Impact resistance IK	3
Protection class	1
Supply	Single battery
Monitoring	Wireless Basic
Operation time	1 h
Battery	3.2V / 3.3 Ah LiFePO4
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	- V
Power consumption max.	5,3 W
Power consumption maintained	3,9 W
Power consumption non-maintained	1,5 W
Ambient temperature maintained mode	-5 °C / 40 °C
Ambient temperature non-maintained mode	-5 °C / 40 °C
Length	54 mm
Width	277 mm



Height	184 mm
Weight	0.89 kg
Weight incl. Packaging	1.06 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	Plug
Dimming function	No
Luminous flux mains mode	190 lm
Luminous flux emergency mode	190 lm
Customs tariff number	94056180
Country of origin	Germany
EAN	4260659560898

## TECHNICAL DRAWING

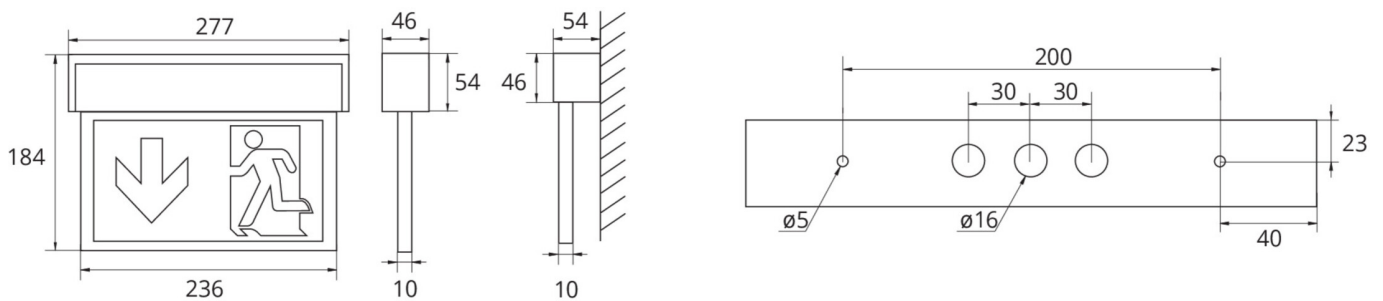

## ACCESSORIES

DSA - cord suspension set 1,5m

2PS-EB -