



Art.-Nr: ASMU011WL
Exit sign Single Battery
Universal, Wireless Professional (WL), 1 h, 22 m, IP40,
Aluminium, Anodised aluminium

Multi-functional aluminium emergency exit sign luminaire for universal mounting. As a result of the clever structure, the recesses for cable entry and fastening are integrated, both for ceiling and wall mounting. Visually appealing side parts cover the lock mechanism so that the luminaire conveys a harmonious and fully closed impression.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/ASMU011WL




TECHNICAL DATA

| | |
|------------------------|-------------------------------------|
| Luminaire type | Exit sign |
| Mounting | Universal |
| Recognition distance | 22 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Aluminium |
| Housing color | Anodised aluminium |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | 3 |
| Certification | WEEE, CE |
| Insulation class | 1 |
| Supply | Single Battery |
| Monitoring | Wireless Professional (WL) |
| Bridging time | 1 h |
| Battery | LiFePO4 3,2 V/3,3 Ah |
| Operating mode | Standby circuit / permanent circuit |
| Input voltageAC | 230 V |



| | |
|--------------------------|---------------------|
| Input frequency | 50 / 60 Hz |
| Input voltage DC | - V |
| Power max. | 5,3 W |
| Power DS | 3,9 W |
| Power BS | 1,5 W |
| Ambient temperature DS | -5 °C to 40 °C |
| Ambient temperature BS | -5 °C to 40 °C |
| Depth | 54 mm |
| Width | 277 mm |
| Height | 184 mm |
| Weight | 0.89 |
| Weight incl. packaging | 1.06 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 190 lm |
| Luminous flux emergency | 190 lm |
| Customs tariff number | 94056180 |
| EAN | 4260659561505 |

TECHNICAL DRAWING

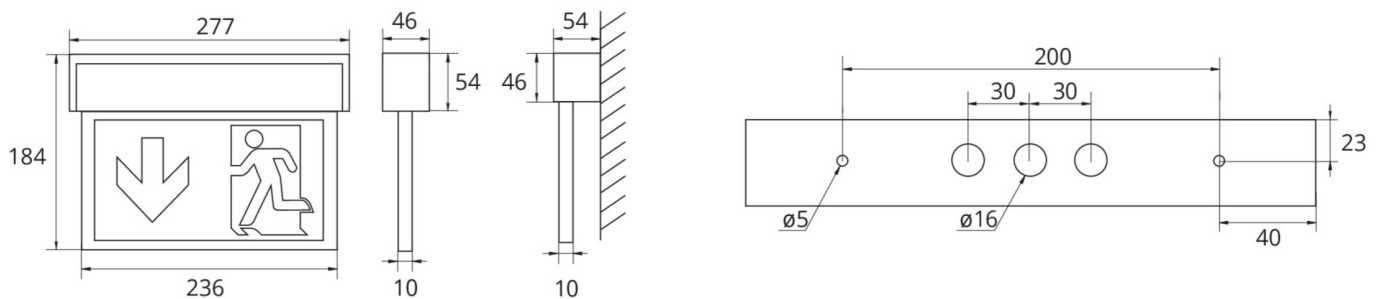



ACCESSORY LIST

DSA - Wire suspension

2PS-EB - Pendant

RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|------------------|---|----------------------------|----------------|--------------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| ASMU011SC |  | SelfControl (SC) | Single battery | Alu eloxiert | € | no | high | no | unlimited | itself |
| ASMU011SC-G10 |  | SelfControl (SC) | Single battery | Alu eloxiert | € | no | high | no | unlimited | itself |
| ASMU011WB |  | Wireless Basic (WB) | Single battery | Alu eloxiert | €€ | yes | low | yes | 50 | central |
| ASMU011WL-G10 |  | Wireless Professional (WL) | Single battery | Alu eloxiert | €€ | yes | low | yes | 1,000 per system | central |
| ASMU011SC-WS |  | SelfControl (SC) | Single battery | RAL 9003 | € | no | high | no | unlimited | itself |
| ASMU011SC-WS-G10 |  | SelfControl (SC) | Single battery | RAL 9003 | € | no | high | no | unlimited | itself |
| ASMU011WB-WS |  | Wireless Basic (WB) | Single battery | RAL 9003 | €€ | yes | low | yes | 50 | central |
| ASMU011WL-WS |  | Wireless Professional (WL) | Single battery | RAL 9003 | €€ | yes | low | yes | 1,000 per system | central |
| ASMU011WL-WS-G10 |  | Wireless Professional (WL) | Single battery | RAL 9003 | €€ | yes | low | yes | 1,000 per system | central |

As of: 23.01.2025 - Subject to technical changes and errors.