



**Art.-Nr: ASMU013WB-WS**  
**Exit sign Self-contained**  
**Universal, Wireless Basic (WB), 3 h, 22 m, IP40, Aluminium,**  
**White**

Multi-functional aluminium emergency exit sign luminaire for universal mounting. As a result of the clever structure, the recesses for cable entry and fastening are integrated, both for ceiling and wall mounting. Visually appealing side parts cover the lock mechanism so that the luminaire conveys a harmonious and fully closed impression.

Wireless control and monitoring for small installations of up to 50 luminaires with Wireless Basic. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/ASMU013WB-WS](http://www.rp-group.com/en/item/ASMU013WB-WS)




## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Aluminium
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	3
Certification	WEEE, CE
Insulation class	1
Supply	Self-contained
Monitoring	Wireless Basic (WB)
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V



Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	5,3 W
Power maintained	3,9 W
Power non-maintained	1,5 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	54 mm
Width	277 mm
Height	184 mm
Weight	0.89
Weight incl. packaging	1.06
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	190 lm
Customs tariff number	94056180
GTIN	4260659560904

## TECHNICAL DRAWING

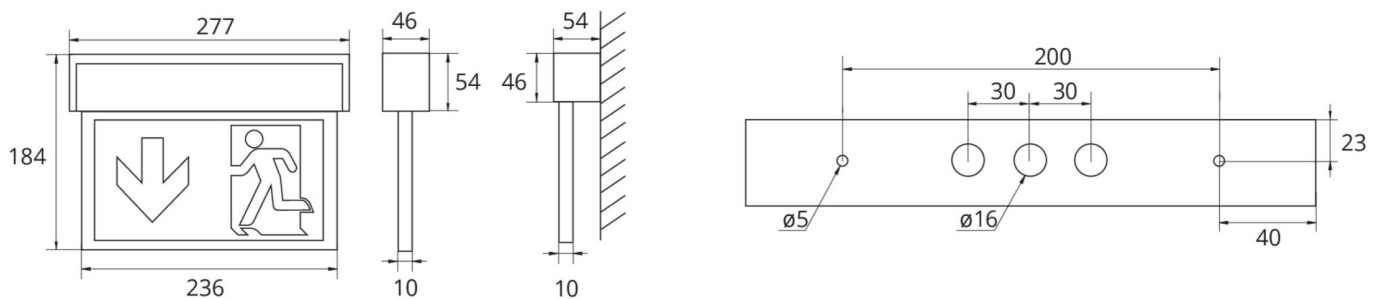



## ACCESSORY LIST

DSA - Wire suspension

2PS-EB - Pendant

## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
ASMU013SC		SelfControl (SC)	Single battery	Alu eloxiert	€	no	high	no	unlimited	itself
ASMU013SC-G10		SelfControl (SC)	Single battery	Alu eloxiert	€	no	high	no	unlimited	itself
ASMU013WB		Wireless Basic (WB)	Single battery	Alu eloxiert	€€	yes	low	yes	50	central
ASMU013WL		Wireless Professional (WL)	Single battery	Alu eloxiert	€€	yes	low	yes	1,000 per system	central
ASMU013WL-G10		Wireless Professional (WL)	Single battery	Alu eloxiert	€€	yes	low	yes	1,000 per system	central
ASMU013SC-WS		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
ASMU013SC-WS-G10		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
ASMU013WL-WS		Wireless Professional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
ASMU013WL-WS-G10		Wireless Professional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 29.07.2025 - Subject to technical changes and errors.