



Art.-Nr: ASMU019ML-WS
Exit sign Centralised power supply systems
Universal, Central power supply (ML), CPS, 22 m, IP40,
Aluminium, White

Multi-functional aluminium emergency exit sign luminaire for universal mounting. As a result of the clever structure, the recesses for cable entry and fastening are integrated, both for ceiling and wall mounting. Visually appealing side parts cover the lock mechanism so that the luminaire conveys a harmonious and fully closed impression.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/ASMU019ML-WS




TECHNICAL DATA

| | |
|------------------------|----------------------------------|
| Luminaire type | Exit sign |
| Mounting | Universal |
| Recognition distance | 22 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Aluminium |
| Housing color | White |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | 3 |
| Certification | WEEE, CE |
| Insulation class | 1 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | single luminaire switching |
| Input voltageAC | 230 V |



| | |
|---|---------------------|
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |
| Power max. | 3,2 W |
| Power maintained | 3,2 W |
| Power non-maintained | 1 W |
| Ambient temperature maintained mode | -30 °C to 40 °C |
| Ambient temperature non-maintained mode | -30 °C to 40 °C |
| Depth | 54 mm |
| Width | 277 mm |
| Height | 184 mm |
| Weight | 0.81 |
| Weight incl. packaging | 0.98 |
| Connection cross-section | 1.5 mm ² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Luminous flux mains | 200 lm |
| Luminous flux emergency | 200 lm |
| Customs tariff number | 94056180 |
| EAN | 4260581712389 |

TECHNICAL DRAWING

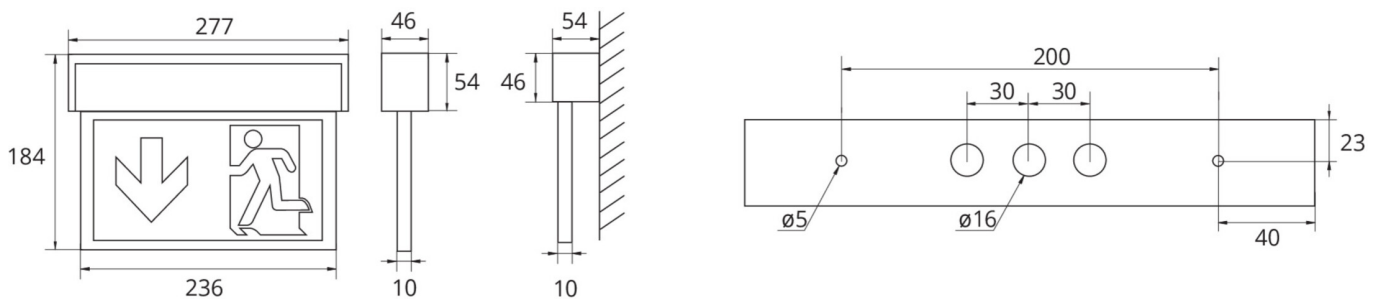



ACCESSORY LIST

DSA - Wire suspension

2PS-EB - Pendant

RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|-----------|-------|---------------------------|----------------------|--------------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| ASMU019ML | | Central power supply (ML) | Central power supply | Alu eloxiert | €€€ | Yes | low | Yes | 1,920 per system | central |
| ASMU519CC | | CoreCompact 24 (CC) | Central power supply | Alu eloxiert | €€ | Yes | low | Yes | | central |

As of: 14.05.2025 - Subject to technical changes and errors.