



Art.-Nr: AXCP403WL Exit sign Self-contained Pendant recessed ceiling, Wireless Professional (WL), 3 h, 30 m, IP20, Zinc die-cast, White

Modern zinc die-cast emergency exit sign luminaire with pendant for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.







More information www.rp-group.com/en/item/AXCP403WL



TECHNICAL DATA

Luminaire type	Exit sign			
Mounting	Pendant recessed ceiling			
Recognition distance	30 m			
Pictograph	Set			
Illuminant	LED			
Housing material	Zinc die-cast			
Housing color	White			
Protection type (IP)	IP20			
Impact resistance (IK)	≥ 3			
Certification	WEEE, CE, 5 years warranty			
Insulation class	2			
Supply	Self-contained			
Monitoring	Wireless Professional (WL)			
Bridging time	3 h			
Battery	LiFePO4 6,4 V/1,2 Ah			
Operating mode	Non-maintained / maintained			
Input voltageAC	230 V			






Input frequency	50 Hz			
Power max.	5,6 W			
Power maintained	4,5 W			
Power non-maintained	0,8 W			
Ambient temperature maintained mode	-5 °C to 40 °C			
Ambient temperature non-maintained mode	-5 °C to 40 °C			
Depth	79 mm			
Width	317 mm			
Height	205 mm			
Installation length	176 mm			
Installation width	68 mm			
Installation height	40 mm			
Weight	1.87			
Weight incl. packaging	2.36			
Connection cross-section	2.5 mm²			
Switching input	Yes			
Emergency light blocking	Yes			
Battery connection	Connector			
Dimming function	Yes			
Customs tariff number	94056180			
EAN	4260682153708			





TECHNICAL DRAWING

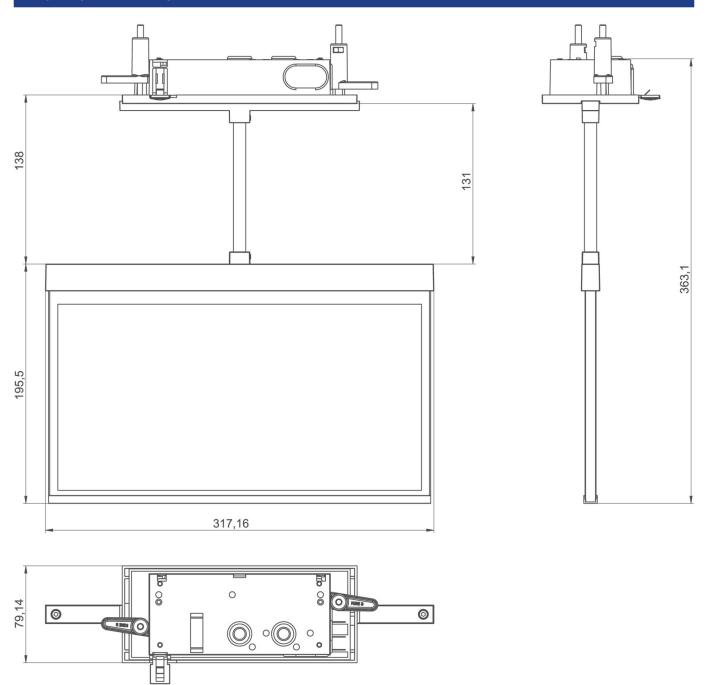

ACCESSORY LIST

AM-XBE -

AM-X-PKG-AZ -

LFP3212.K-SET-2AKKU - Battery





RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXCP403WL- AZ	₹	Wireless Pro- fessional (WL)	Single battery	RAL 7016	€€	yes	low	yes	1,000 per system	central
AXCP403WL-E	A >	Wireless Pro- fessional (WL)	Single battery	Edelstahl	€€	yes	low	yes	1,000 per system	central

As of: 16.04.2025 - Subject to technical changes and errors.