



Art.-Nr: AXDC408WL-E Exit sign Self-contained Rope ceiling structure, Wireless Professional (WL), 8 h, 30 m, IP40, Zinc die-cast, Stainless steel

Modern zinc die-cast emergency exit sign luminaire with wire suspension for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.







More information www.rp-group.com/en/item/AXDC408WL-E



TECHNICAL DATA

Luminaire type	Exit sign			
Mounting	Rope ceiling structure			
Recognition distance	30 m			
Pictograph	Set			
Illuminant	LED			
Housing material	Zinc die-cast			
Housing color	Stainless steel			
Protection type (IP)	IP40			
Impact resistance (IK)	≥ 3			
Certification	WEEE, CE, 5 years warranty			
Insulation class	2			
Supply	Self-contained			
Monitoring	Wireless Professional (WL)			
Bridging time	8 h			
Battery	LiFePO4 6,4 V/1,2 Ah			
Operating mode	Non-maintained / maintained			
Input voltageAC	230 V			






Input frequency	50 Hz				
input frequency					
Power max.	5,6 W				
Power maintained	4,5 W				
Power non-maintained	0,8 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	80 mm				
Width	312 mm				
Height	228 mm				
Weight	2.24				
Weight incl. packaging	2.73				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
EAN	4260682154972				





TECHNICAL DRAWING

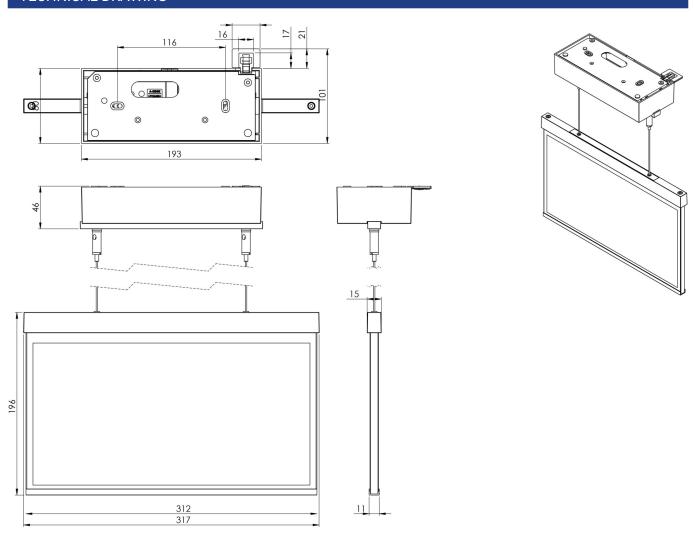

ACCESSORY LIST

AM-X-APA - Surface-mounted adapter AM/AX

LFPN3212-SET-2AKKU - Battery





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXDC408WL	₹ }	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
AXDC408WL- AZ	7	Wireless Pro- fessional (WL)	Single battery	RAL 7016	€€	yes	low	yes	1,000 per system	central

As of: 21.05.2025 - Subject to technical changes and errors.