



Art.-Nr: AXDC509CC-E Exit sign Centralised power supply systems Rope ceiling structure, CoreCompact 24 (CC), CPS, 30 m, IP40, Zinc die-cast, Stainless steel

Modern zinc die-cast emergency exit sign luminaire with wire suspension for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information
www.rp-group.com/en/item/AXDC509CC-E



TECHNICAL DATA

Luminaire type	Exit sign			
Mounting	Rope ceiling structure			
Recognition distance	30 m			
Pictograph	Set			
Illuminant	LED			
Housing material	Zinc die-cast			
Housing color	Stainless steel			
Protection type (IP)	IP40			
Impact resistance (IK)	≥ 3			
Certification	WEEE, CE			
Insulation class	2			
Supply	Centralised power supply systems			
Monitoring	CoreCompact 24 (CC)			
Bridging time	CPS			
Battery	/			
Operating mode	Standby circuit / permanent circuit			
Input voltageAC	24 V			






D	0.414			
Power max.	3,4 W			
Power DS	3,4 W			
Power BS	0,4 W			
Ambient temperature DS	-5 °C to 40 °C			
Ambient temperature BS	-5 °C to 40 °C			
Depth	80 mm			
Width	312 mm			
Height	228 mm			
Weight	2.02			
Weight incl. packaging	2.51			
Connection cross-section	2.5 mm²			
Switching input	No			
Emergency light blocking	No			
Battery connection	No			
Luminous flux mains	230 lm			
Luminous flux emergency	230 lm			
Customs tariff number	94056180			
EAN	4260682156747			





TECHNICAL DRAWING

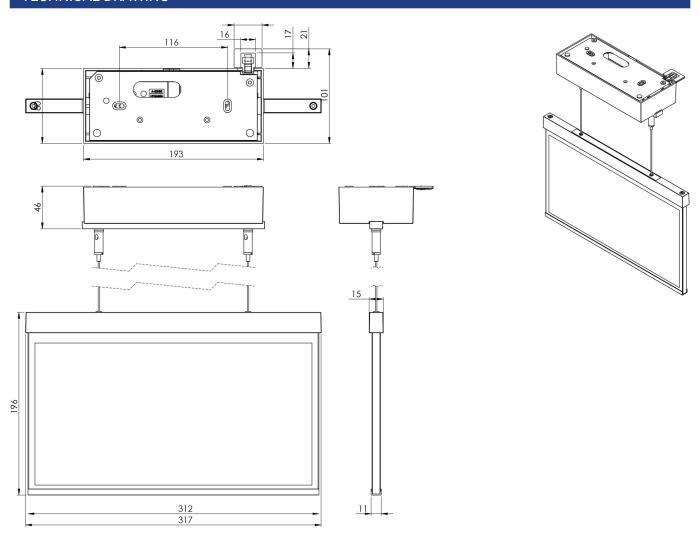

ACCESSORY LIST

AM-X-APA - Surface-mounted adapter AM/AX





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXDC009ML	₹	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
AXDC009ML- AZ	₹	Central power supply (ML)	Central power supply	RAL 7016	€€€	Yes	low	Yes	1,920 per system	central
AXDC009ML-E	₹	Central power supply (ML)	Central power supply	Edelstahl	€€€	Yes	low	Yes	1,920 per system	central
AXDC509CC	₹ →	CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central
AXDC509CC- AZ	₹	CoreCompact 24 (CC)	Central power supply	RAL 7016	€€	Yes	low	Yes		central

As of: 29.01.2025 - Subject to technical changes and errors.