



# Art.-Nr: AXDP509CC-AZ Exit sign Centralised power supply systems Pendulum ceiling construction, CoreCompact 24 (CC), CPS, 30 m, IP40, Zinc die-cast, Anthracite

Modern zinc die-cast emergency exit sign luminaire with pendant for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information
www.rp-group.com/en/item/AXDP509CC-



#### **TECHNICAL DATA**

Luminaire type	Exit sign				
Mounting	Pendulum ceiling construction				
Recognition distance	30 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Zinc die-cast				
Housing color	Anthracite				
Protection type (IP)	IP40				
Impact resistance (IK)	≥ 3				
Certification	WEEE, CE				
Insulation class	2				
Supply	Centralised power supply systems				
Monitoring	CoreCompact 24 (CC)				
Bridging time	CPS				
Battery	/				
Operating mode	Standby circuit / permanent circuit				
Input voltageAC	24 V				







Power max.	3,4 W
Power DS	3,4 W
Power BS	0,4 W
Ambient temperature DS	-5 °C to 40 °C
Ambient temperature BS	-5 °C to 40 °C
Depth	80 mm
Width	312 mm
Height	228 mm
Weight	1.84
Weight incl. packaging	2.33
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	230 lm
Luminous flux emergency	230 lm
Customs tariff number	94056180
EAN	4260682156761





# TECHNICAL DRAWING

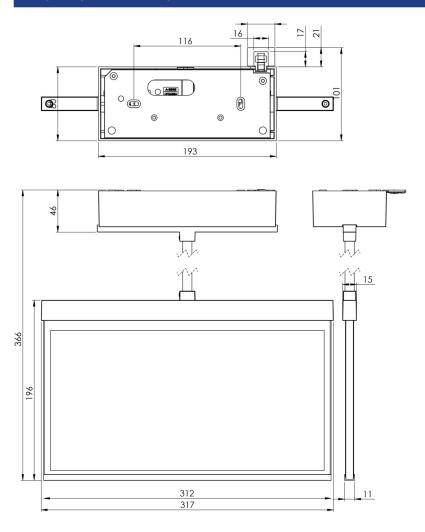



### **ACCESSORY LIST**

 $\label{eq:am-X-APA-Surface-mounted} \mbox{ AM-X-APA - Surface-mounted adapter AM/AX}$ 

AM-X-PKG -





## RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXDP009ML	<b>₹</b> →	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
AXDP009ML- AZ	<b>₹</b>	Central power supply (ML)	Central power supply	RAL 7016	€€€	Yes	low	Yes	1,920 per system	central
AXDP009ML-E	<b>₹</b> →	Central power supply (ML)	Central power supply	Edelstahl	€€€	Yes	low	Yes	1,920 per system	central
AXDP509CC	<b>3</b> >	CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central
AXDP509CC-E	<b>₹</b>	CoreCompact 24 (CC)	Central power supply	Edelstahl	€€	Yes	low	Yes		central

As of: 29.01.2025 - Subject to technical changes and errors.