



Art.-Nr: AXEP009ML Exit sign Centralised power supply systems Pendant recessed ceiling, Central power supply (ML), CPS, 30 m, IP20, Zinc die-cast, White

Modern zinc die-cast emergency exit sign luminaire with pendant for recessed mounting in the ceiling. With an installation diameter of 68 mm, this luminaire can be easily integrated into many environments. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/AXEP009ML

TECHNICAL DATA

CE

Luminaire type	Exit sign				
Mounting	Pendant recessed ceiling				
Recognition distance	30 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Zinc die-cast				
Housing color	White				
Protection type (IP)	IP20				
Impact resistance (IK)	≥ 3				
Certification	WEEE, CE				
Insulation class	2				
Supply	Centralised power supply systems				
Monitoring	Central power supply (ML)				
Bridging time	CPS				
Battery	/				
Operating mode	single luminaire switching				







Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	4,5 W
Power maintained	4,5 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	92 mm
Width	312 mm
Height	204 mm
Weight	2.28
Weight incl. packaging	2.77
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Customs tariff number	94056180
EAN	4260581715823





TECHNICAL DRAWING

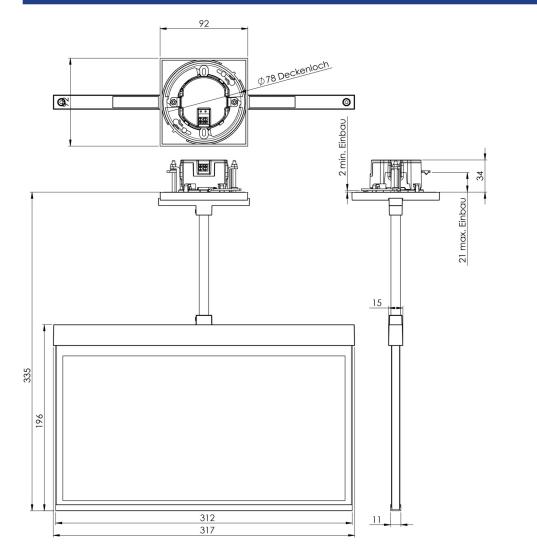



ACCESSORY LIST

AM-X-PKG -





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXEP009ML- AZ		Central power supply (ML)	Central power supply	RAL 7016	€€€	Yes	low	Yes	1,920 per sys- tem	central
AXEP009ML-E		Central power supply (ML)	Central power supply	Edelstahl	€€€	Yes	low	Yes	1,920 per sys- tem	central
AXEP509CC	Ţ ₹	CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central
AXEP509CC- AZ		CoreCompact 24 (CC)	Central power supply	RAL 7016	€€	Yes	low	Yes		central
AXEP509CC-E	 ₹	CoreCompact 24 (CC)	Central power supply	Edelstahl	€€	Yes	low	Yes		central

As of: 14.05.2025 - Subject to technical changes and errors.