



Art.-Nr: AXR401WL-AZ Exit sign Self-contained Recessed wall mounting, Wireless Professional (WL), 1 h, 30 m, IP40, Zinc die-cast, Anthracite

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.









www.rp-group.com/en/item/AXR401WL-AZ



TECHNICAL DATA

Luminaire type	Exit sign				
Mounting	Recessed wall mounting				
Recognition distance	30 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Zinc die-cast Anthracite				
Housing color					
Protection type (IP)	IP40				
Impact resistance (IK)	≥ 3 WEEE, CE, 5 years warranty 2				
Certification					
Insulation class					
Supply	Self-contained				
Monitoring	Wireless Professional (WL)				
Bridging time	1 h				
Battery	LiFePO4 6,4 V/1,2 Ah				
Operating mode	Non-maintained / maintained				
Input voltageAC	230 V				






Input frequency	50 Hz				
Power max.	5,6 W				
Power maintained	4,5 W				
Power non-maintained	0,8 W				
Ambient temperature maintained mode	-5 °C to 40 °C -5 °C to 40 °C				
Ambient temperature non-maintained mode					
Depth	80 mm				
Width	312 mm				
Height	238 mm				
Installation length	176 mm				
Installation width	68 mm 40 mm				
Installation height					
Weight	1.53				
Weight incl. packaging	2.02				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
EAN	4260682153999				





TECHNICAL DRAWING

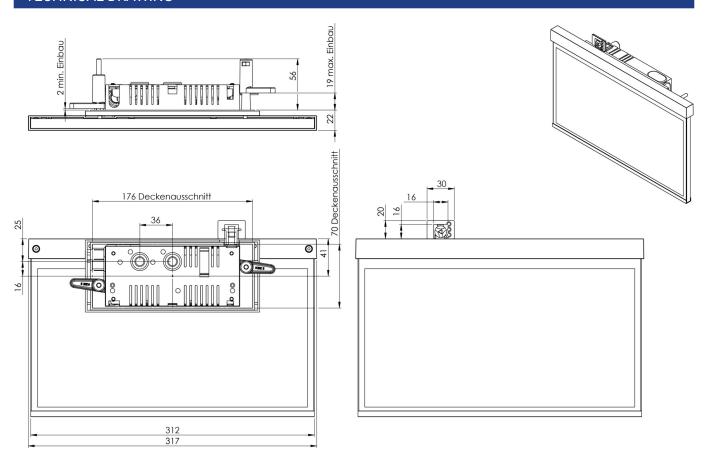

ACCESSORY LIST

BALLPLX-AX - Wire mesh surround

AM-XBE -

LFP3212.K-SET-2AKKU - Battery

RELATED PRODUCTS

A	rtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
А	XR401WL	₹	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
A	XR401WL-E	()	Wireless Pro- fessional (WL)	Single battery	Edelstahl	€€	yes	low	yes	1,000 per system	central

As of: 16.04.2025 - Subject to technical changes and errors.