



#### Art.-Nr: AXR401WL-E Exit sign Self-contained Recessed wall mounting, Wireless Professional (WL), 1 h, 30 m, IP40, Zinc die-cast, Stainless steel

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall and for identifying emergency and escape routes.


It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.













#### **TECHNICAL DATA**

Luminaire type	Exit sign				
Mounting	Recessed wall mounting				
Recognition distance	30 m				
Pictograph	Set				
Illuminant	LED Zinc die-cast				
Housing material					
Housing color	Stainless steel				
Protection type (IP)	IP40				
Impact resistance (IK)	≥ 3				
Certification	WEEE, CE, 5 years warranty				
Insulation class	2				
Supply	Self-contained				
Monitoring	Wireless Professional (WL)				
Bridging time	1 h				
Battery	LiFePO4 6,4 V/1,2 Ah				
Operating mode	Non-maintained / maintained				
Input voltageAC	230 V				






Input frequency	50 Hz				
Power max.	5,6 W				
Power maintained	4,5 W				
Power non-maintained	0,8 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	80 mm				
Width	312 mm				
Height	238 mm				
Installation length	176 mm				
Installation width	68 mm				
Installation height	40 mm				
Weight	1.53				
Weight incl. packaging	2.02				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
EAN	4260682155078				





# **TECHNICAL DRAWING**

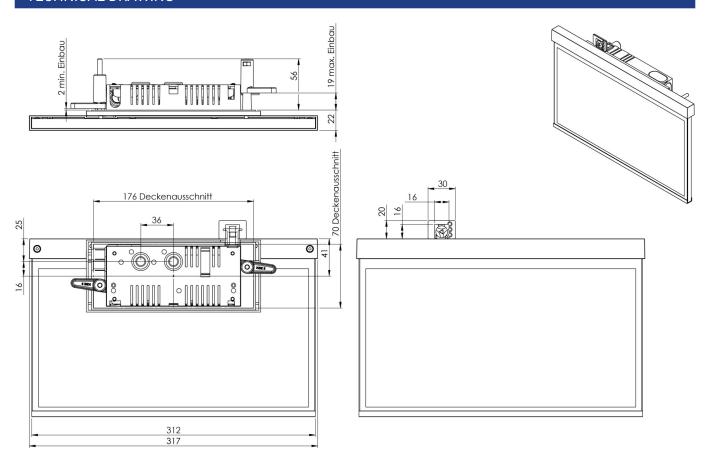

# **ACCESSORY LIST**

BALLPLX-AX - Wire mesh surround

AM-XBE -

LFP3212.K-SET-2AKKU - Battery

### RELATED PRODUCTS

ArtI	No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXR4	401WL	<b>₹</b>	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
AXR4	401WL-AZ	<b>?</b>	Wireless Pro- fessional (WL)	Single battery	RAL 7016	€€	yes	low	yes	1,000 per system	central

As of: 16.04.2025 - Subject to technical changes and errors.