



Art.-Nr: AXR408WL-AZ Exit sign Self-contained Recessed wall mounting, Wireless Professional (WL), 8 h, 30 m, IP40, Zinc die-cast, Anthracite

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.









www.rp-group.com/en/item/AXR408WL-AZ



TECHNICAL DATA

Luminaire type	Exit sign				
Mounting	Recessed wall mounting				
Recognition distance	30 m				
Pictograph	Set				
Illuminant	LED Zinc die-cast				
Housing material					
Housing color	Anthracite				
Protection type (IP)	IP40				
Impact resistance (IK)	≥ 3				
Certification	WEEE, CE, 5 years warranty				
Insulation class	2				
Supply	Self-contained Wireless Professional (WL)				
Monitoring					
Bridging time	8 h				
Battery	LiFePO4 6,4 V/1,2 Ah				
Operating mode	Non-maintained / maintained				
Input voltageAC	230 V				






Input frequency	50 Hz				
Power max.	5,6 W				
Power maintained	4,5 W				
Power non-maintained	0,8 W				
Ambient temperature maintained mode	-5 °C to 40 °C -5 °C to 40 °C 80 mm				
Ambient temperature non-maintained mode					
Depth					
Width	312 mm				
Height	238 mm				
Installation length	176 mm				
Installation width	68 mm				
Installation height	40 mm				
Weight	1.53				
Weight incl. packaging	2.02				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
EAN	4260682154033				





TECHNICAL DRAWING

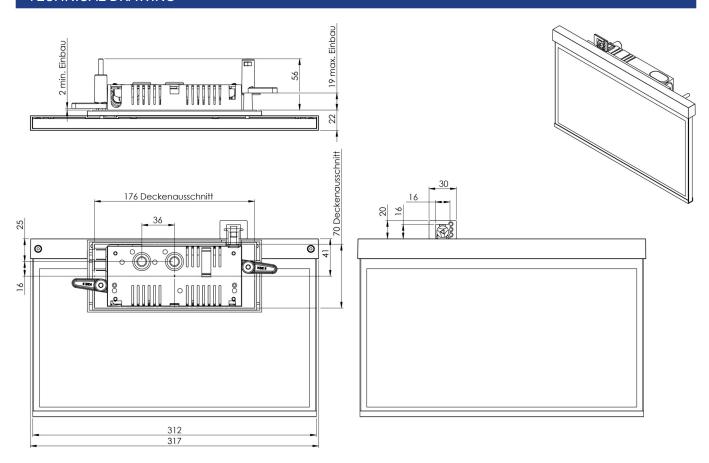

ACCESSORY LIST

BALLPLX-AX - Wire mesh surround

AM-XBE -

LFP3212.K-SET-2AKKU - Battery

RELATED PRODUCTS

Aı	rtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
A	XR408WL	₹	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
AX	KR408WL-E	\(\frac{1}{2}\)	Wireless Pro- fessional (WL)	Single battery	Edelstahl	€€	yes	low	yes	1,000 per system	central

As of: 16.04.2025 - Subject to technical changes and errors.