



Art.-Nr: AXW003SC-AZ Exit sign Self-contained Wall mounting, SelfControl (SC), 3 h, 30 m, IP40, Zinc diecast, Anthracite

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information www.rp-group.com/en/item/AXW003SC-AZ



TECHNICAL DATA

| Luminaire type | Exit sign |
|------------------------|-----------------------------|
| Mounting | Wall mounting |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Anthracite |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | WEEE, CE |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | SelfControl (SC) |
| Bridging time | 3 h |
| Battery | NIMH 4,8 V/2,0 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltageAC | 230 V |

www.rp-group.com






| Input frequency | 50 / 60 Hz |
|---|---------------------|
| Power max. | 5,7 W |
| Power maintained | 5,7 W |
| Power non-maintained | 0,35 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 50 mm |
| Width | 312 mm |
| Height | 194 mm |
| Weight | 1.73 |
| Weight incl. packaging | 2.22 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Customs tariff number | 94056180 |
| EAN | 4260581716370 |





TECHNICAL DRAWING

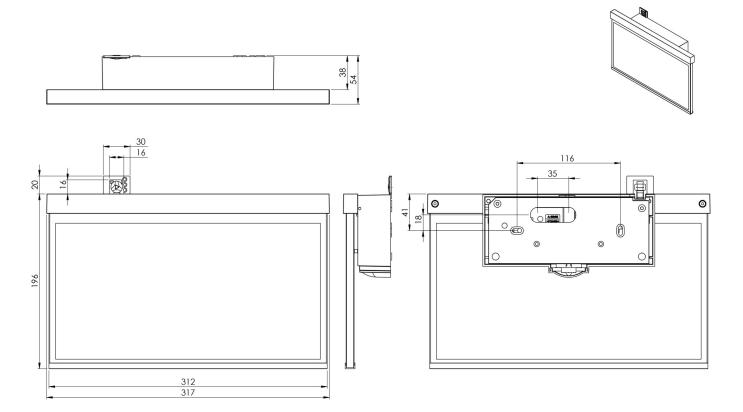

ACCESSORY LIST

BALLPLX-AX - Wire mesh surround

AM-X-APA - Surface-mounted adapter AM/AX

RELATED PRODUCTS

| ArtNo. | lmage | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote main- tenance | max. luminai- res | Single luminai- re monitoring |
|------------|---------------|---------------------|----------------|-----------|------------|---------------|----------------------|-------------------------|----------------------|----------------------------------|
| AXW003SC | S > | SelfControl (SC) | Single battery | RAL 9003 | € | no | high | no | unlimited | itself |
| AXW003SC-E | | SelfControl (SC) | Single battery | Edelstahl | € | no | high | no | unlimited | itself |

As of: 14.05.2025 - Subject to technical changes and errors.