



### Art.-Nr: AXW401WL-E Exit sign Self-contained Wall mounting, Wireless Professional (WL), 1 h, 30 m, IP40, Zinc die-cast, Stainless steel

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.











### **TECHNICAL DATA**

Luminaire type	Exit sign			
Mounting	Wall mounting			
Recognition distance	30 m			
Pictograph	Set			
Illuminant	LED			
Housing material	Zinc die-cast			
Housing color	Stainless steel			
Protection type (IP)	IP40			
Impact resistance (IK)	≥ 3			
Certification	WEEE, CE, 5 years warranty			
Insulation class	2			
Supply	Self-contained			
Monitoring	Wireless Professional (WL)			
Bridging time	1 h			
Battery	LiFePO4 3,2 V/1,2 Ah			
Operating mode	Non-maintained / maintained			
Input voltage AC	230 V			






Input frequency	50 Hz				
Power max.	5,6 W				
Power maintained	4,5 W				
Power maintained					
Power non-maintained	0,8 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	50 mm				
Width	312 mm				
Height	194 mm				
Weight	1.65				
Weight incl. packaging	2.14				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
GTIN	4260682152602				





# **TECHNICAL DRAWING**

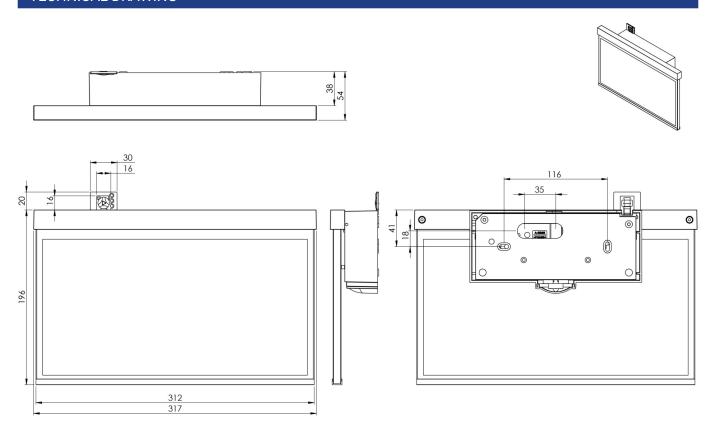

# **ACCESSORY LIST**

BALLPLX-AX - Wire mesh surround

AM-X-APA - Surface-mounted adapter AM/AX

LFPN3212-SET-2AKKU - Battery

# **RELATED PRODUCTS**

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXW401WL	<b>₹</b>	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
AXW401WL- AZ	<b>F</b>	Wireless Pro- fessional (WL)	Single battery	RAL 7016	€€	yes	low	yes	1,000 per system	central

As of: 14.12.2025 - Subject to technical changes and errors.