



#### Art.-Nr: AXW403WL-E Exit sign Self-contained Wall mounting, Wireless Professional (WL), 3 h, 30 m, IP40, Zinc die-cast, Stainless steel

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information www.rp-group.com/en/item/AXW403WL-E



### **TECHNICAL DATA**

CE

Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Stainless steel
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, 5 years warranty
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	LiFePO4 6,4 V/1,2 Ah
Operating mode	Non-maintained / maintained
Input voltageAC	230 V






Input frequency	50 Hz			
Power max.	5,6 W			
Power maintained	4,5 W			
Power non-maintained	0,8 W			
Ambient temperature maintained mode	-5 °C to 40 °C			
Ambient temperature non-maintained mode	-5 °C to 40 °C			
Depth	50 mm			
Width	312 mm			
Height	194 mm			
Weight	1.76			
Weight incl. packaging	2.25			
Connection cross-section	2.5 mm²			
Switching input	Yes			
Emergency light blocking	Yes			
Battery connection	Connector			
Dimming function	Yes			
Customs tariff number	94056180			
EAN	4260682152626			





### **TECHNICAL DRAWING**

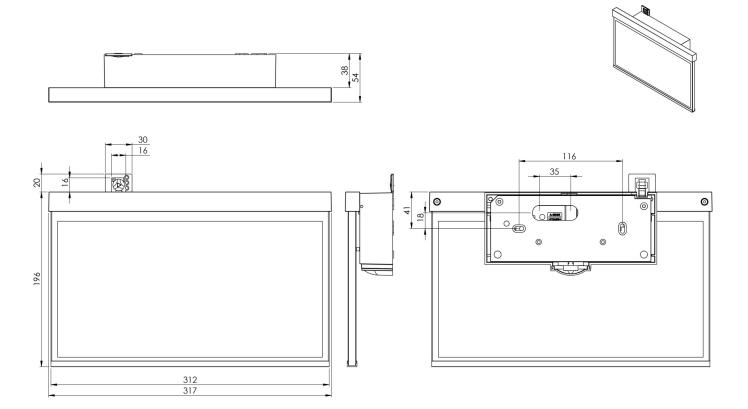

# ACCESSORY LIST

BALLPLX-AX - Wire mesh surround AM-X-APA - Surface-mounted adapter AM/AX LFP3212.K-SET-2AKKU - Battery

## **RELATED PRODUCTS**

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXW403WL	<u>₹</u>	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per sys- tem	central
AXW403WL- AZ		Wireless Pro- fessional (WL)	Single battery	RAL 7016	€€	yes	low	yes	1,000 per sys- tem	central

As of: 16.04.2025 - Subject to technical changes and errors.