




Art.-Nr: COPA-0062UG-NWS
LED frame panel "EDGE" ceiling inlay luminaire, square,
615x615x15mm, 38W, 2600lm, 4000K, CRI >80, IP20, UGR
<19, white

LED recessed luminaire, frame panel, EDGE series, for 625 mm ceiling module. Flat shape. Aluminium frame, white, powder-coated. Diffuser made from plastic (PMMA), opal, non-yellowing. Power supply, can be switched or dimmed (DALI/ TRIAC dimmer), external. Version with CASAMBI® Bluetooth control, RGBW and tunable white available.

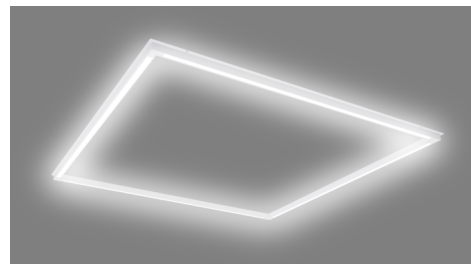

More information

www.rp-group.com/en/item/COPA-0062UG-NWS



TECHNICAL DATA


Dimensions	
Product dimensions Length	615 mm
Product dimensions Width	615 mm
Product dimensions Height	15 mm
Product weight	0.46 kg
Packaging dimensions	
Packaging dimensions Length	640 mm
Packaging dimensions Width	635 mm
Packaging dimensions Height	30 mm
Weight incl. packaging	0.56 kg
Color	
Color	white
Housing material	
Housing material	Aluminium
Certification	
Certification	CE, RoHS
Insulation class	2
Protection type (IP)	IP20
Protection type (IP)	IP40
Electrical connection	



Type of dimming	CASAMBI
System performance	40 W
Input voltage AC	220-240V / 50-60Hz V
Power factor	90 PF
power supply	
Electrical design	with external control gear, Switchable
Light data	
Light source	LED
Rated luminous flux	2600 lm
Colour rendering index	> 80 Ra
Beam angle	92/90 °
Color temperature	4000 K
Light color	840
UGR	16.6
Temperatures	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	+40 °C
Mounting	
Mounting	Ceiling mounting
CASAMBI Products	
Communication type	Bluetooth
Max. transmission power	+4 dBm



TEXT.LICHTVERTEILUNG

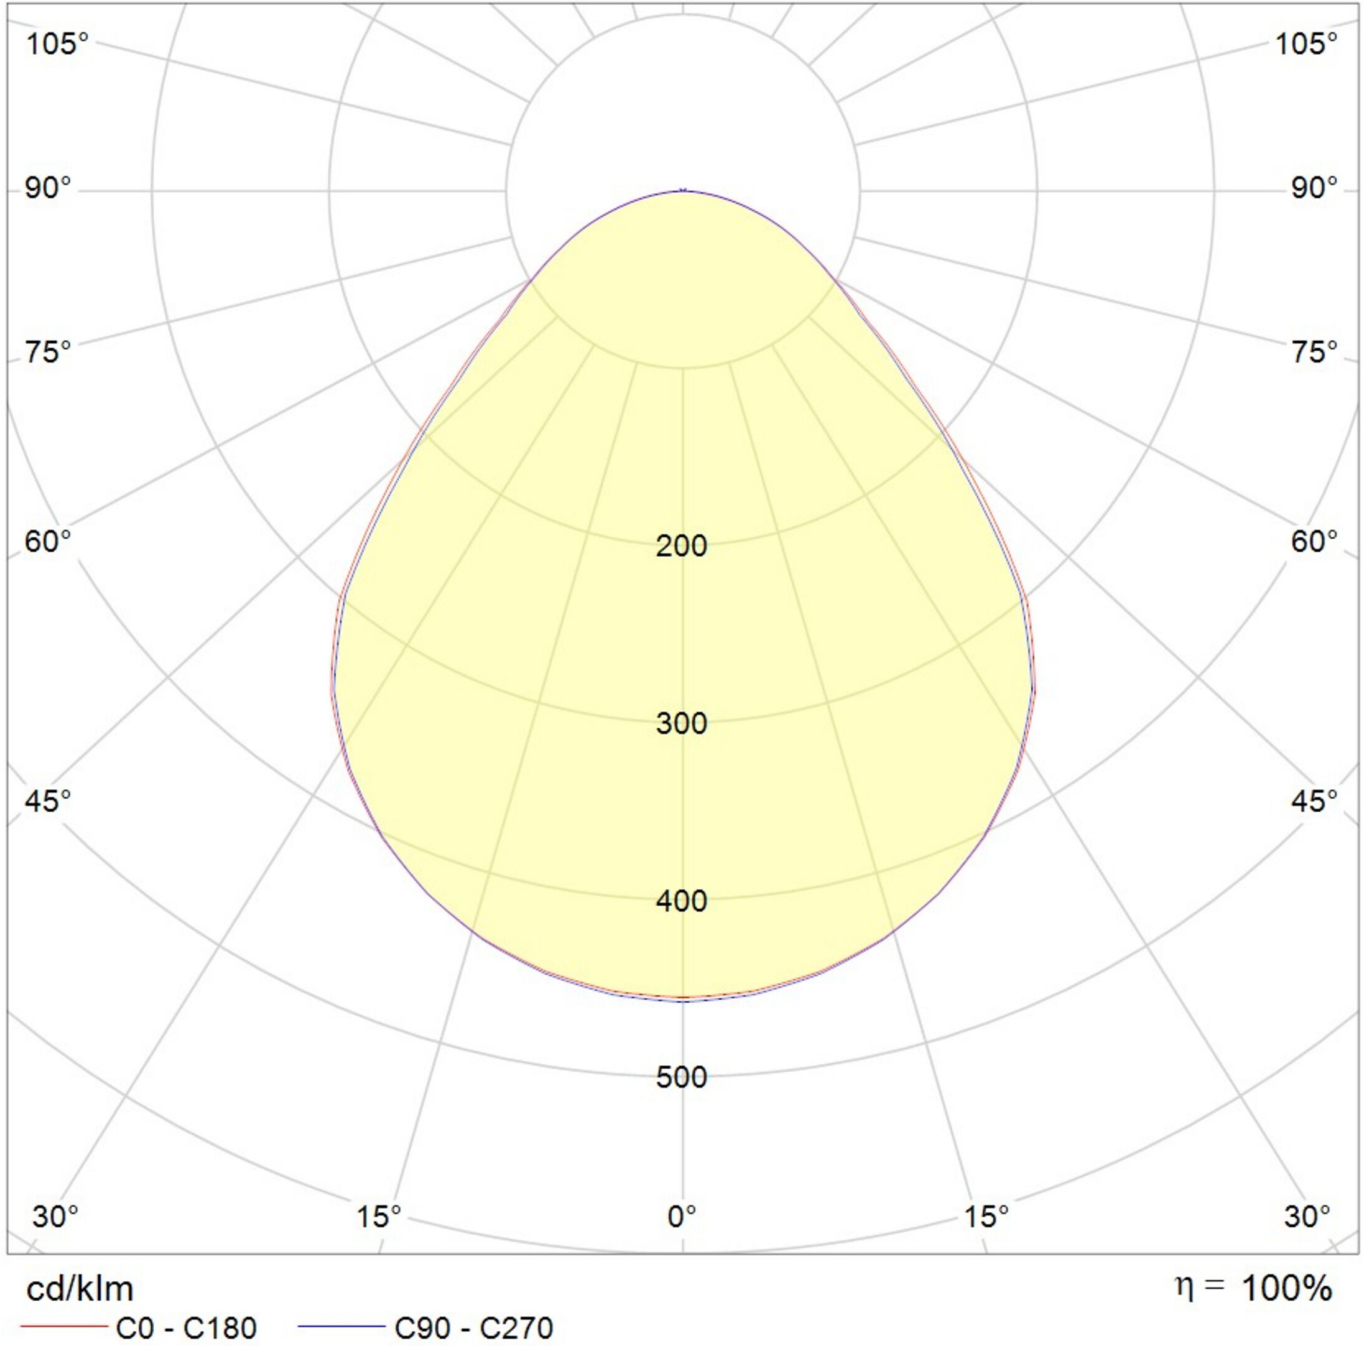

As of: 05.09.2024 - Subject to technical changes and errors.