




**Art.-Nr: DOE029**  
**Safety luminaire Centralised power supply systems**  
**Ceiling mounting, Without monitoring, CPS, , IP20, Plastic,**  
**Transparent**

Small LED safety luminaire, for recessed and surface mounting, with great effect. The small dimensions and transparent housing material make completely unobtrusive mounting possible.

This variant is intended for installation in ceilings. The mounting plate/clips, as well as the emergency light technology in a housing with strain relief, are supplied.

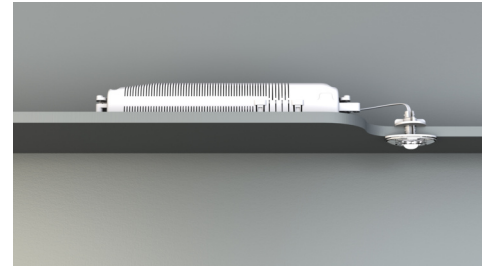

More information  
[www.rp-group.com/en/item/DOE029](http://www.rp-group.com/en/item/DOE029)



## TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Ceiling mounting
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	Transparent
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, TÜV Rheinland Type approved, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	1,9 W




Power DS	1,9 W
Power BS	0 W
Ambient temperature DS	-25 °C to 40 °C
Ambient temperature BS	-25 °C to 40 °C
Depth	24 mm
Width	50 mm
Height	12 mm
Installation dimensions Diameter	10.5 mm
Weight	0.19
Weight incl. packaging	0.27
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	140 lm
Luminous flux emergency	140 lm
Customs tariff number	94056120
EAN	4260123683597



TECHNICAL DRAWING



e 10.5

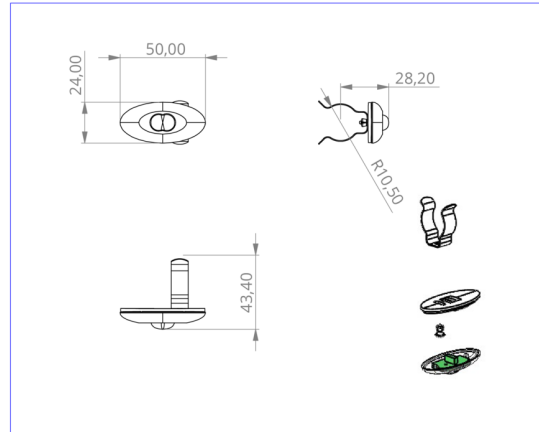

DO verschiedene Einbaumaße

## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
DOE029ML		Central power supply (ML)	Central power supply	Transparent	€€€	Yes	low	Yes	1,920 per system	central

As of: 22.01.2025 - Subject to technical changes and errors.