


## ER-Light ceiling/spot, round, SB + SC/3h

LED emergency luminaire for ceiling mounting and for the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838. The zinc-aluminum luminaire fits unobtrusively on the ceiling. The status LED integrated within the lens does not interrupt the harmony of the housing. The optimal light distribution and lighting of escape and rescue routes is achieved by use of cluster lenses and powerful ERT LED technology.

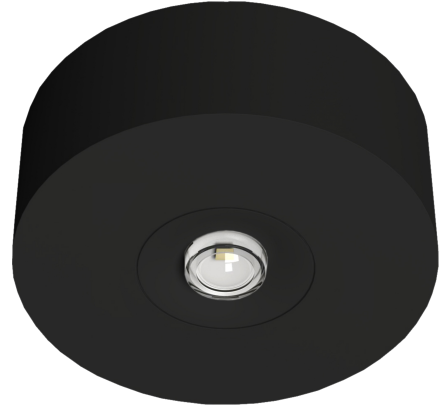


## Technical data

Luminaire type	Emergency luminaire
Mounting	Ceiling
Viewing distance	
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Colour	RAL 7016
Mechanical rating IP	40
Impact resistance IK	
Protection class	2
Supply	Central battery system
Monitoring	ML - Central battery system
Operation time	ZBA
Battery	
Operation mode	single luminaire switching
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	216 V
Power consumption max.	4,6 W
Power consumption maintained	4,6 W
Power consumption non-maintained	1,2 W
Ambient temperature maintained mode	-20 °C / 30 °C

Ambient temperature non-maintained mode	-20 °C / 40 °C
Length	40 mm
Width	100 mm
Height	100 mm
Diameter	100 mm
Install. dim. length	
Install. dim. width	
Install. dim. height	
Install. dim. diameter	
Weight	0.29 kg
Weight incl. Packaging	0.33 kg
Connection cross-section	2.5 mm
Switching input L'	No
Emergency light blocking	No
Battery connector	None
Dimming function	Yes
Luminous flux mains mode	360 lm
Luminous flux emergency mode	360 lm
Customs tariff number	94056080
Country of origin	Deutschland
EAN	4260581711641

## Technical drawing

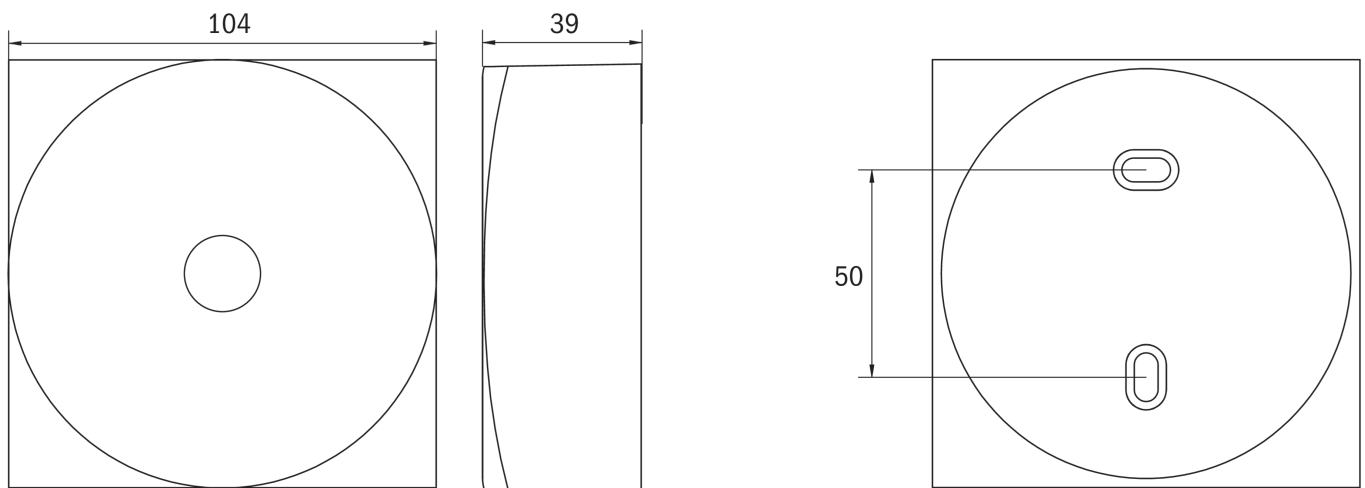

## Accessory list

ILD-APA

IL-distance plate / cable entry

State of: 06 / 2019