




Art.-Nr: FL10NW
General light, Emergency light Centralised power supply systems
Wall mounting, Without monitoring, CPS, , IP65, Zinc die-cast, Light grey



LED safety luminaire for illuminating escape and emergency routes in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838. Thanks to its IP65 protection class and coated aluminium housing, the practical floodlight is suited to indoor and outdoor areas. Thanks to the wide beam angle, large areas can be illuminated with ease. Individual luminaire monitoring can be achieved with an additional, externally fitted MU05, DCBLU05 or MU04 monitoring module.

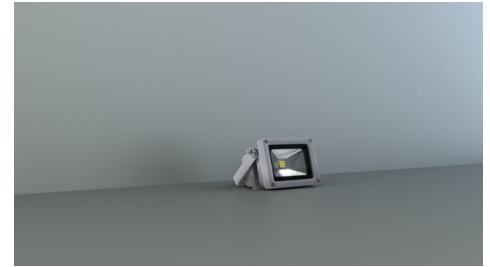

More information
www.rp-group.com/en/item/FL10NW



TECHNICAL DATA




Luminaire type	General light, Emergency light
Mounting	Wall mounting
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Light grey
Protection type (IP)	IP65
Impact resistance (IK)	7
Certification	WEEE, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Non-maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	11,3 W



Power maintained	11,3 W
Power non-maintained	0 W
Ambient temperature maintained mode	-25 °C to 35 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	115 mm
Width	88 mm
Height	86 mm
Weight	2.05
Weight incl. packaging	2.12
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	900 lm
Luminous flux emergency	900 lm
Customs tariff number	94054210
EAN	4260581710262



TECHNICAL DRAWING

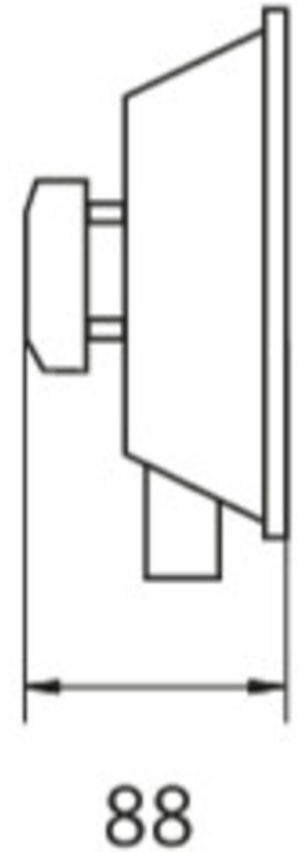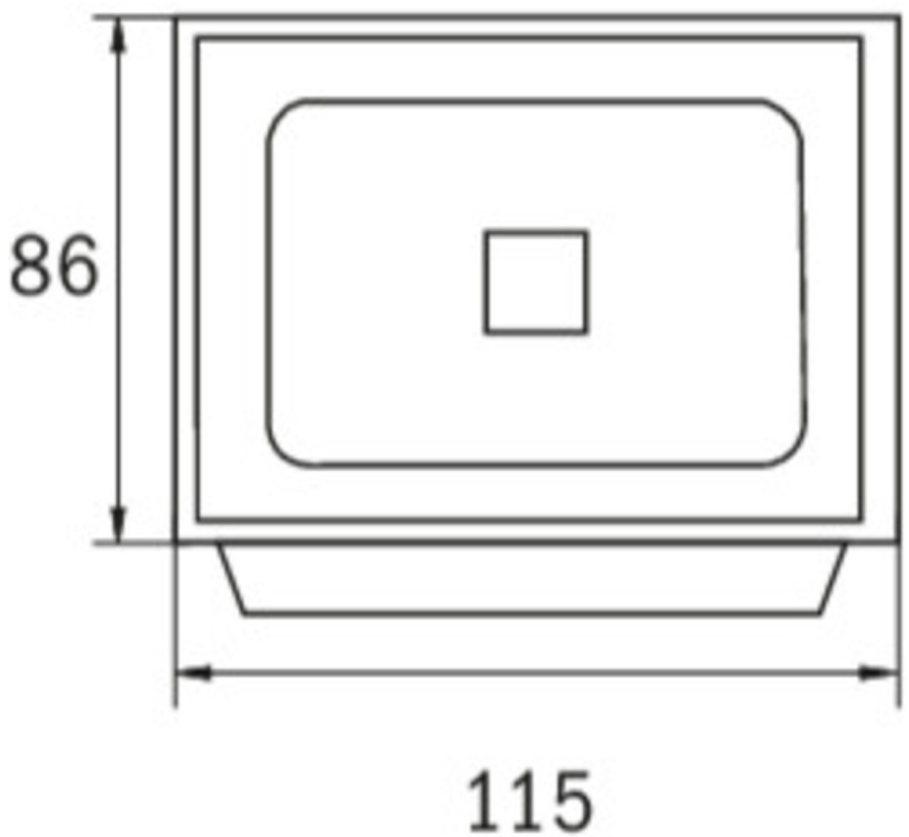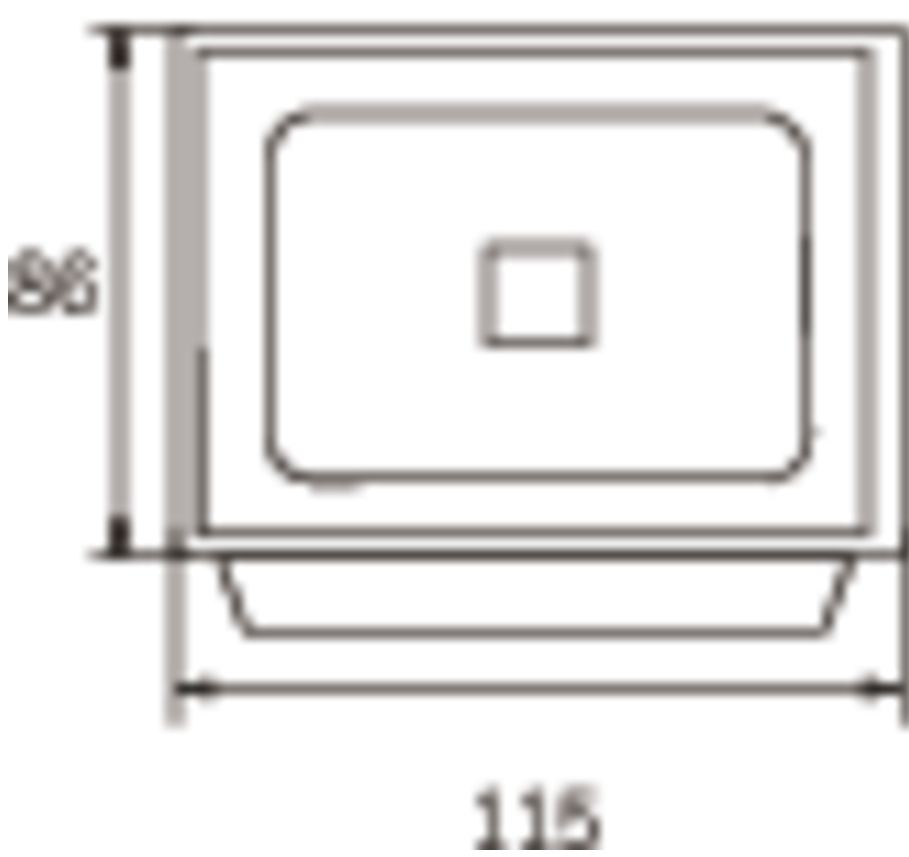



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
----------	-------	------------	--------	-------	------------	---------------	-------------------	--------------------	-----------------	-----------------------------

As of: 17.05.2025 - Subject to technical changes and errors.