



Art.-Nr: FMW008SC
Exit sign Self-contained
Wall mounting, SelfControl (SC), 8 h, 20 m, IP65, Zinc die-cast, White

Robust zinc die-cast emergency exit sign luminaire for mounting on the wall and for identifying emergency and escape routes.

The pictogram is fitted on the inside where it is protected by a transparent pane.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/FMW008SC




TECHNICAL DATA

| | |
|------------------------|-----------------------------|
| Luminaire type | Exit sign |
| Mounting | Wall mounting |
| Recognition distance | 20 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | White |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 8 |
| Certification | WEEE, CE, D-Sign, HACCP |
| Insulation class | 1 |
| Supply | Self-contained |
| Monitoring | SelfControl (SC) |
| Bridging time | 8 h |
| Battery | NIMH 4,8 V/2,0 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltageAC | 230 V |
| Input frequency | 50 / 60 Hz |
| Power max. | 4,2 W |



| | |
|---|---------------------|
| Power maintained | 4,2 W |
| Power non-maintained | 0,35 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 58 mm |
| Width | 262 mm |
| Height | 188 mm |
| Weight | 2.08 |
| Weight incl. packaging | 2.18 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Customs tariff number | 94056180 |
| EAN | 4260581710903 |

TECHNICAL DRAWING

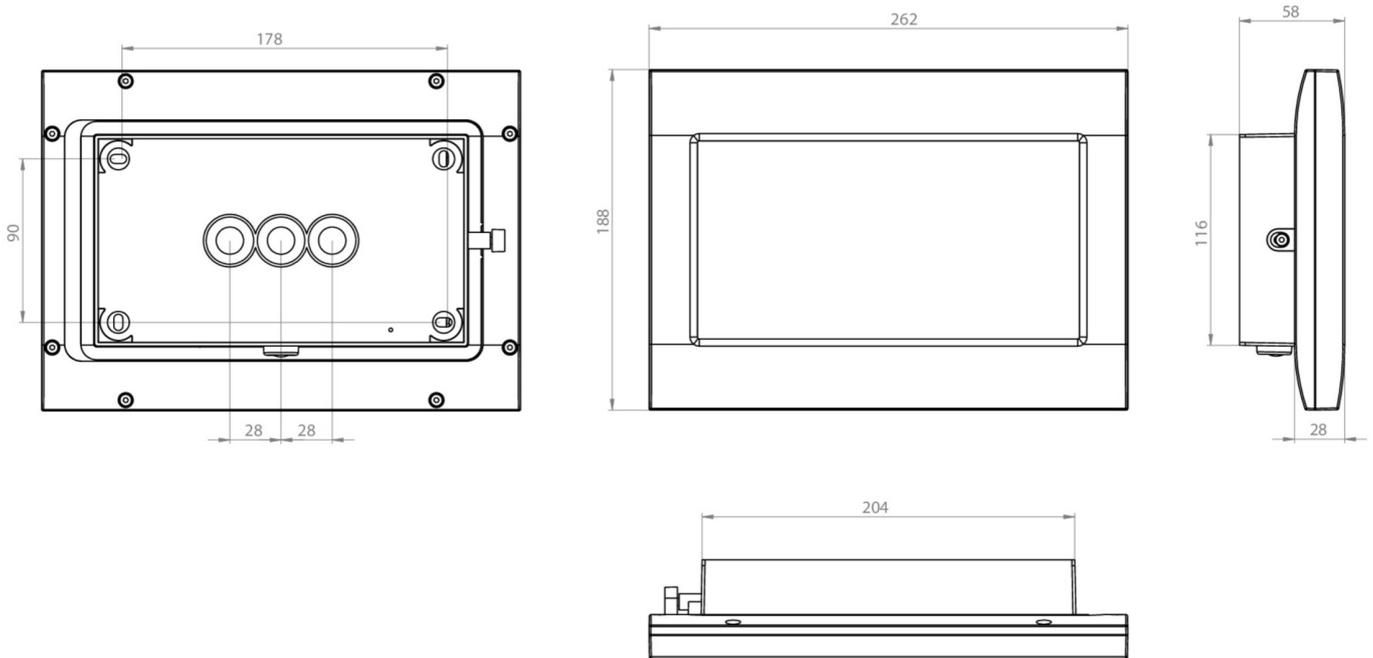



ACCESSORY LIST

FMWA001 -
FMDA001 -
FMDA002-AZ -
FMFH -
FMDA001-AZ -
FMDA002 -

RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|-------------|-------|------------------|----------------|----------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|
| FMW008SC-AZ | | SelfControl (SC) | Single battery | RAL 7016 | € | no | high | no | unlimited | itself |

As of: 16.05.2025 - Subject to technical changes and errors.