



## Art.-Nr: GABD403SC Exit sign Self-contained Surface mounting, SelfControl (SC), 3 h, 40 m, IP40, Polycarbonate, White

Emergency exit sign luminaire with plastic pane for surface mounting on the ceiling and for identifying emergency and escape routes. It is based on the design of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design. The luminaires are equipped with modern LED illuminants and provide flexibility through their interchangeable pictograms.

Automatic monitoring of safety luminaire with SelfControl. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.



More information www.rp-group.com/en/item/GABD403SC



## TECHNICAL DATA

CE

| Luminaire type         | Exit sign                   |
|------------------------|-----------------------------|
| Mounting               | Surface mounting            |
| Recognition distance   | 40 m                        |
| Pictograph             | acc. to Specification       |
| Illuminant             | LED                         |
| Housing material       | Polycarbonate               |
| Housing color          | White                       |
| Protection type (IP)   | IP40                        |
| Impact resistance (IK) | 5                           |
| Certification          | WEEE, CE, 5 years warranty  |
| Insulation class       | 2                           |
| Supply                 | Self-contained              |
| Monitoring             | SelfControl (SC)            |
| Bridging time          | 3 h                         |
| Battery                | LiFePO4 6,4 V/1,2 Ah        |
| Operating mode         | Non-maintained / maintained |
| Input voltageAC        | 180 V - 250 V               |
| Input frequency        | 50 Hz                       |






| Power max.                              | 4,2 W          |
|---|----------------|
| Power maintained                        | 3,3 W          |
| Power non-maintained                    | 0,9 W          |
| Ambient temperature maintained mode     | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth                                   | 80.9 mm        |
| Width                                   | 417.5 mm       |
| Height                                  | 245.5 mm       |
| Weight                                  | 1.42           |
| Weight incl. packaging                  | 2.07           |
| Switching input                         | Yes            |
| Emergency light blocking                | No             |
| Battery connection                      | Connector      |
| Dimming function                        | No             |
| Customs tariff number                   | 94056120       |
| EAN                                     | 4260766559570  |





## **TECHNICAL DRAWING**

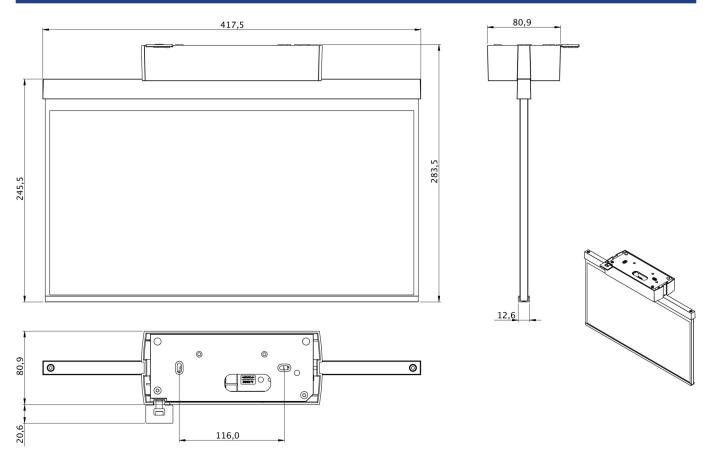

As of: 23.04.2025 - Subject to technical changes and errors.