



Art.-Nr: GAXW408SC
Exit sign Self-contained
Wall mounting, SelfControl (SC), 8 h, 30 m, IP40,
Polycarbonate, White

Emergency exit sign luminaire with plastic pane for surface mounting on the wall and for identifying emergency and escape routes. It is based on the design of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design. The luminaires are equipped with modern LED illuminants and provide flexibility through their interchangeable pictograms.

Automatic monitoring of safety luminaire with SelfControl. Display edge luminaire with integrated light distribution for even pictogram illumination. Suited to inscription on one or two sides. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information
www.rp-group.com/en/item/GAXW408SC



TECHNICAL DATA


| | |
|------------------------|-----------------------------|
| Luminaire type | Exit sign |
| Mounting | Wall mounting |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | 5 |
| Certification | WEEE, CE, 5 years warranty |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | SelfControl (SC) |
| Bridging time | 8 h |
| Battery | LiFePO4 6,4 V/1,2 Ah |
| Operating mode | Non-maintained / maintained |



| | |
|---|----------------|
| Input voltageAC | 180 V - 250 V |
| Input frequency | 50 Hz |
| Power max. | 2,6 W |
| Power maintained | 1,7 W |
| Power non-maintained | 0,9 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 56.1 mm |
| Width | 317.5 mm |
| Height | 195.5 mm |
| Weight | 1.03 |
| Weight incl. packaging | 1.52 |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Customs tariff number | 94056120 |
| EAN | 4262483022641 |



TECHNICAL DRAWING

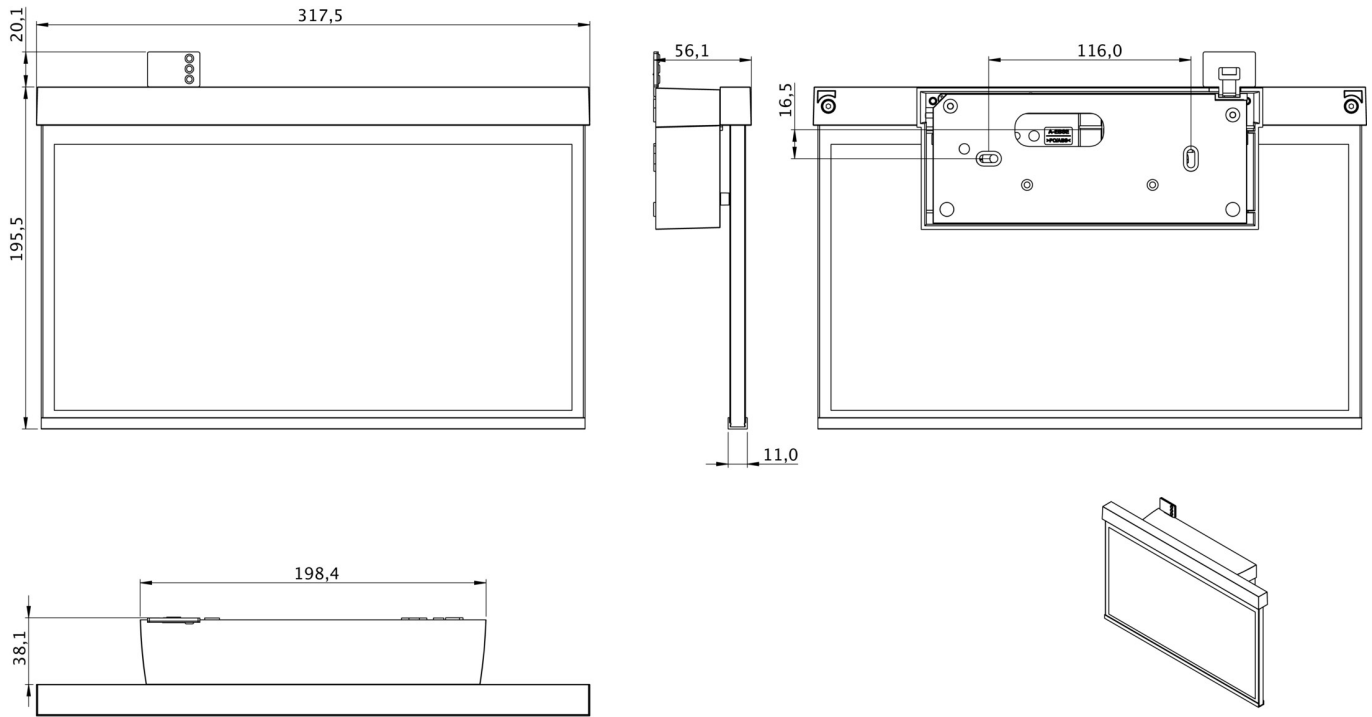

As of: 16.04.2025 - Subject to technical changes and errors.