



Art.-No.: HO-27508DG-WW
LED outdoor luminaire "QUADRO", wall / ceiling surface mounting, square, 280x280x80mm, 13W, 1000lm, 3000K, CRI >80, IP54, anthracite, switchable

LED exterior façade luminaire, Quadro series. Housing made from die-cast aluminium, dark grey or white, powder-coated, IP54. Diffuser made from plastic (PC), opal, UV-stabilised. Operating unit installed (can be switched). Version with CASAMBI® Bluetooth control available.



DANE TECHNICZNE


Electrical data	
Input Voltage AC	AC 220-240V / 50-60Hz
Power Factor	0,95
System power	13 W
Inrush current	10 A
Electrical version	with internal operating device, switchable
CASAMBI Ready	Yes
Photometrical data	
Light source	LED
Colour temperature	3 000 K
Rated luminous flux	1 005 lm
Light colour	830
Colour rendering index (CRI)	> 80
Beam angle	117 °
UGR	23
Lifetime (h, at 25°C)	50 000 h, L80
Acceptance tests	
Certifications	CE
Protection class	I
Ingress protection (IP) rating	IP 54
Ambient temperature	-20 to +40 C°



Physical data	
Mounting method	wall mounted, ceiling mounted
Housing material	Aluminium
Housing colour	black
Cover material	PC
Length (L)	280 mm
Width (B)	280 mm
Height (H)	80 mm
Product weight	1,84 kg
Weight incl. Packaging	1,95 kg
Packaging Length (L)	330 mm
Packaging Width (B)	330 mm
Packaging Height (H)	100 mm



LIGHT DISTRIBUTION

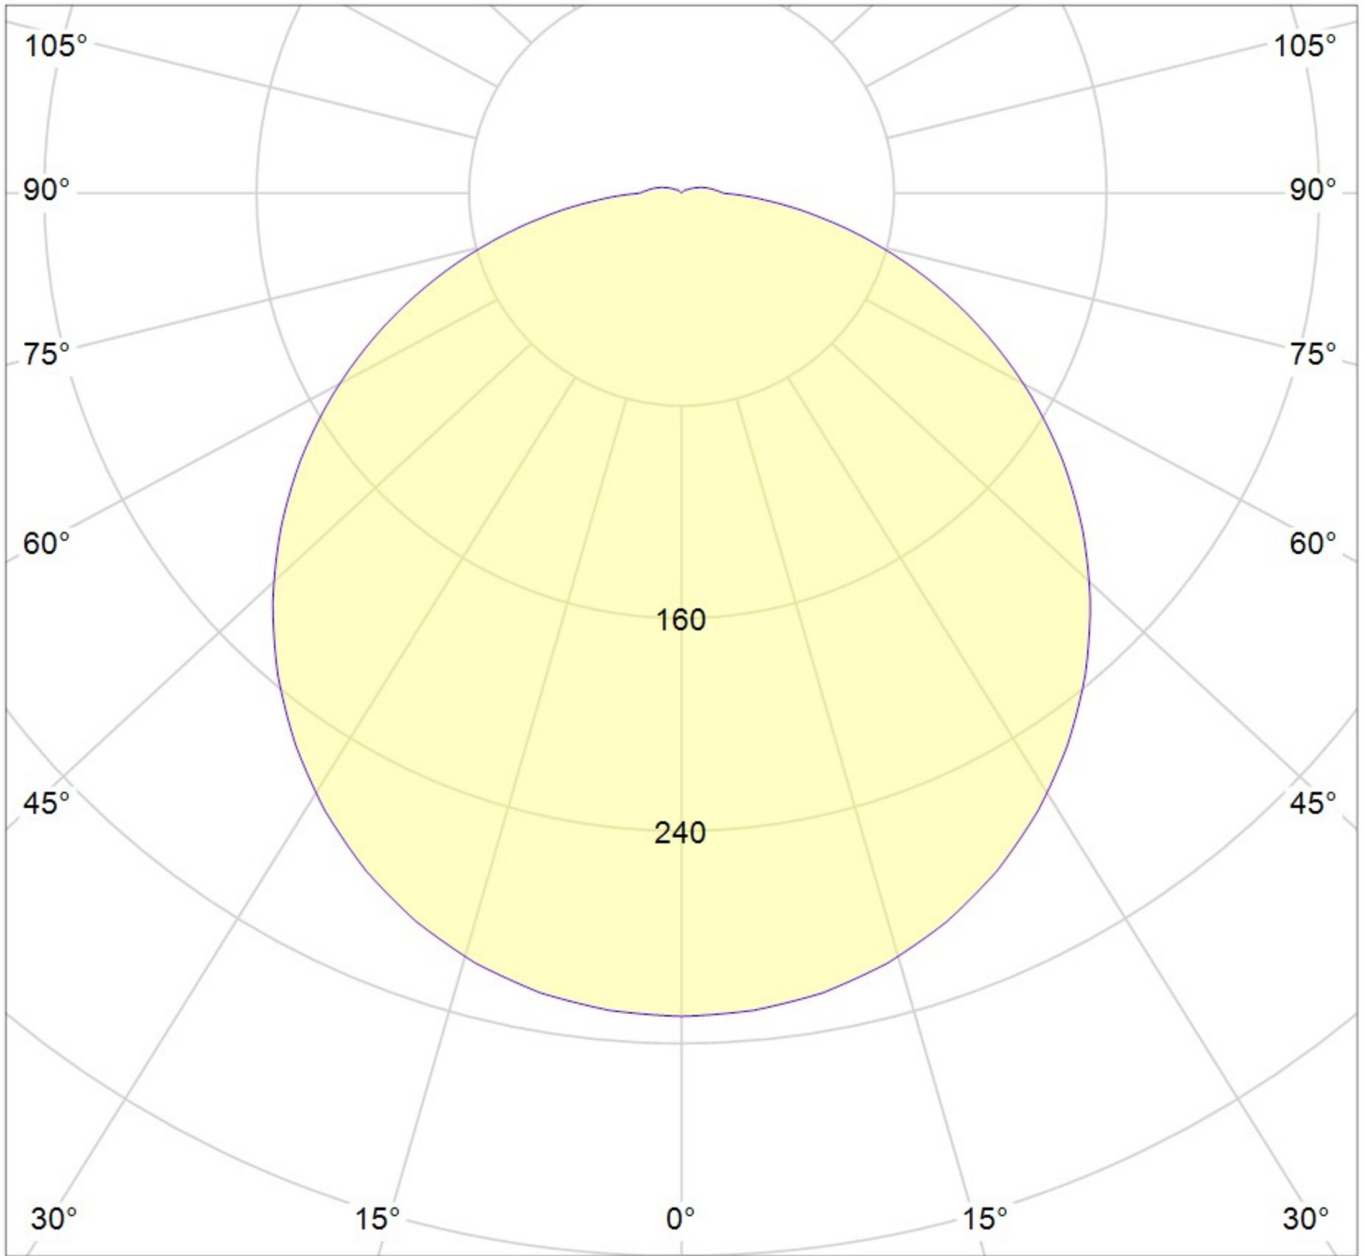

cd/klm

— C0 - C180 — C90 - C270

$\eta = 100\%$