



## Emergency luminaire Art.-No.: ILEL029ML

The discreet designed LED emergency luminaire IL is a true all-rounder. Whether as self-contained emergency light or to connect to central battery systems: it is fit for most challenges and always provides the right solution. The innovative integrated lens carrier with quick-mounting device enables the flexible use of different lens types depending on the application. Round and corridor lenses are already included in the scope of delivery for each light and enable perfect adaptation to the respective installation situation.

The IL recessed mounted luminaire consists of 2 parts, the recessed mounted part includes the power supply terminals. The electronic part of the luminaire is at disassembly mains voltage free.



### TECHNICAL DATA


Luminaire type	Emergency luminaire
Mounting	Recessed ceiling
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Colour	RAL 9003
Mechanical rating IP	20
Impact resistance IK	≥ 3
Protection class	2
Supply	Central power supply system
Operation time	CPS
Operation mode	single luminaire switching
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	216 V
Power consumption max.	4,6 W
Power consumption maintained	4,6 W
Power consumption non-maintained	1,2 W
Ambient temperature maintained mode	-20 °C / 30 °C
Ambient temperature non-maintained mode	-20 °C / 40 °C
Height	84 mm



Diameter	122 mm
Install. dim. height	80 mm
Install. dim. diameter	105 mm
Weight	0.15 kg
Weight incl. Packaging	0.21 kg
Connection cross-section	2.5 mm
Switching input L'	No
Emergency light blocking	No
Battery connector	None
Dimming function	Yes
Luminous flux mains mode	360 lm
Luminous flux emergency mode	360 lm
Customs tariff number	94056120
Coutry of origin	Germany
EAN	4260766550324



## TECHNICAL DRAWING

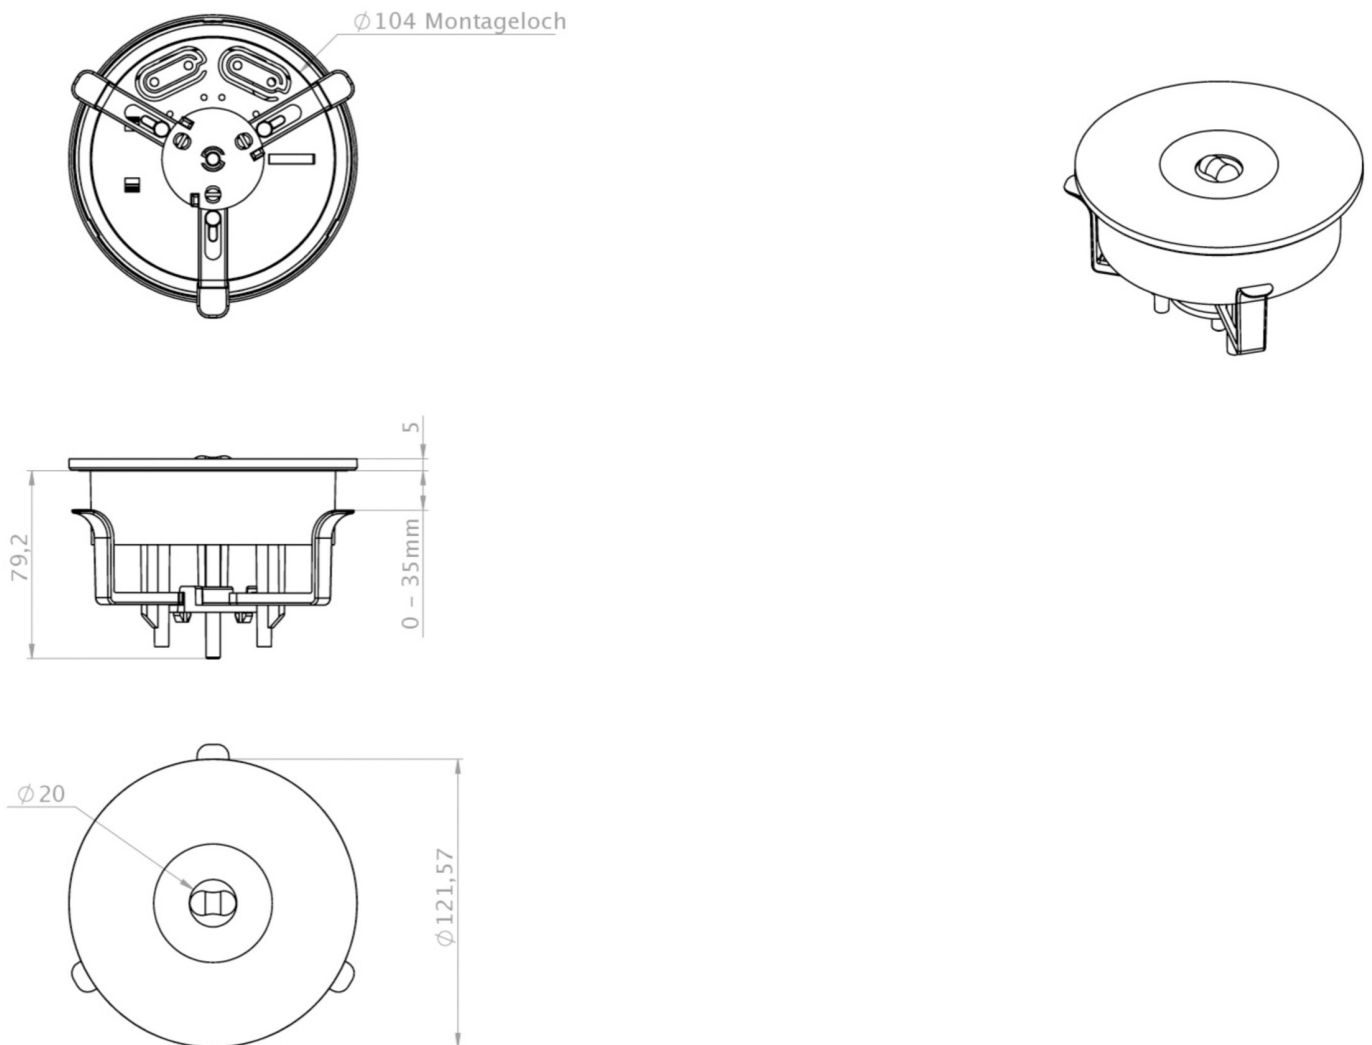

## ACCESSORIES

BALLPLX-ILE - Ball protection 190x190x62mm incl. fastening

ILE-OEF-PC - IL recessed opener plastic