



**Art.-Nr: KAXU403WL**  
**Exit sign Self-contained**  
**Universal, Wireless Professional (WL), 3 h, 30 m, IP65,**  
**Polycarbonate, White**

Cuboid polycarbonate luminaire design, discreetly reduced to the essentials. The design and universal installation is based on the KB luminaire, whereby the edge for holding the escape sign is permanently installed. The luminaires are equipped with modern LED lighting devices and offer flexibility through interchangeable pictograms. The high degree of protection enables use in damp rooms or environments with high levels of soiling.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Display edge luminaire with integrated light distribution for even pictogram illumination. Suited to inscription on one or two sides. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes the option of mounting the luminaire either on the wall or ceiling.



More information

[www.rp-group.com/en/item/KAXU403WL](http://www.rp-group.com/en/item/KAXU403WL)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	7
Certification	WEEE, CE, 5 years warranty
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	LiFePO4 6,4 V/1,2 Ah



Operating mode	Non-maintained / maintained
Input voltageAC	230 V
Input frequency	50 Hz
Power max.	5,6 W
Power maintained	4,5 W
Power non-maintained	0,8 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	326 mm
Width	50 mm
Height	248 mm
Weight	0.23
Weight incl. packaging	0.43
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Customs tariff number	94056120
EAN	4260766551635



## TECHNICAL DRAWING

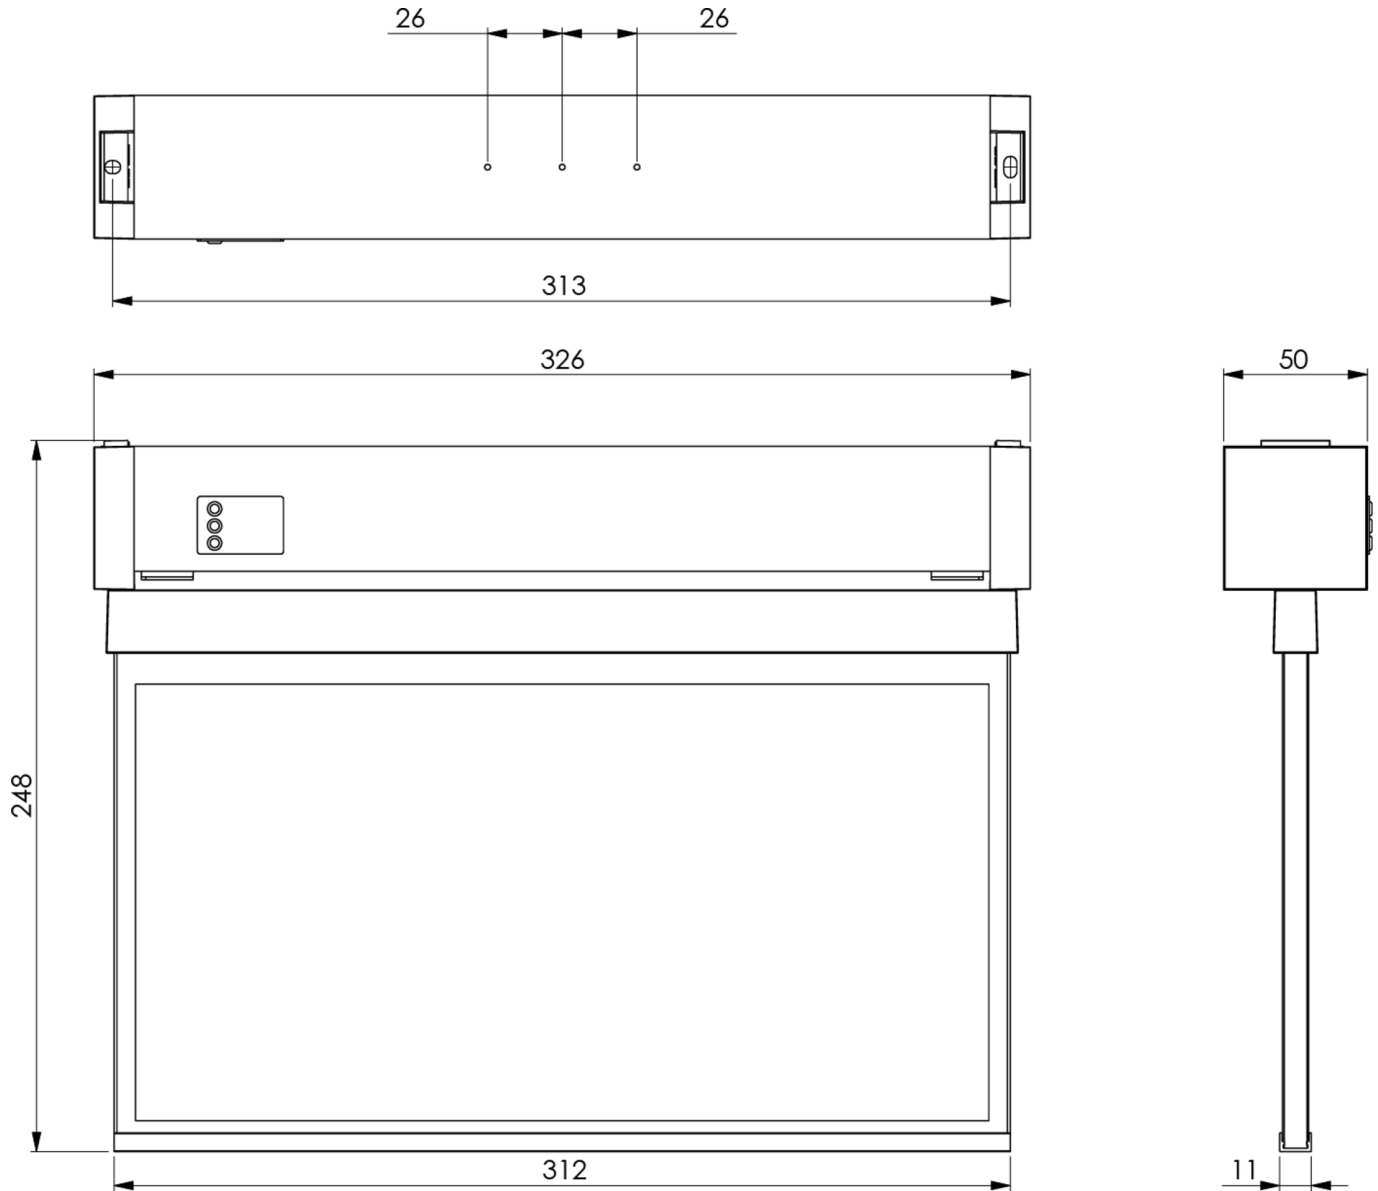

As of: 16.04.2025 - Subject to technical changes and errors.