



Art.-Nr: KCD011SC Exit sign Self-contained Surface mounting, SelfControl (SC), 1 h, 30 m, IP40, Polycarbonate, White

Slim convex plastic emergency exit sign luminaire for ceiling mounting. Suited to inscription on one or two sides. The plug-in set of pictograms is fitted on the inside without the use of solvents.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/KCD011SC



TECHNICAL DATA

| Luminaire type | Exit sign |
|------------------------|-----------------------------|
| Mounting | Surface mounting |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | WEEE, CE, D-Sign |
| Insulation class | 1 |
| Supply | Self-contained |
| Monitoring | SelfControl (SC) |
| Bridging time | 1 h |
| Battery | NIMH 4,8 V/2,0 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltageAC | 230 V |
| Input frequency | 50 / 60 Hz |
| Power max. | 6,1 W |





| Power maintained | 4,5 W | | | | |
|---|----------------|--|--|--|--|
| Power non-maintained | 0,35 W | | | | |
| Ambient temperature maintained mode | -5 °C to 40 °C | | | | |
| Ambient temperature non-maintained mode | -5 °C to 40 °C | | | | |
| Depth | 90 mm | | | | |
| Width | 340 mm | | | | |
| Height | 170 mm | | | | |
| Weight | 1.06 | | | | |
| Weight incl. packaging | 1.17 | | | | |
| Connection cross-section | 2.5 mm² | | | | |
| Switching input | Yes | | | | |
| Emergency light blocking | Yes | | | | |
| Battery connection | Connector | | | | |
| Dimming function | Yes | | | | |
| Luminous flux mains | 220 lm | | | | |
| Luminous flux emergency | 300 lm | | | | |
| Customs tariff number | 94056120 | | | | |
| EAN | 4260682143518 | | | | |






TECHNICAL DRAWING





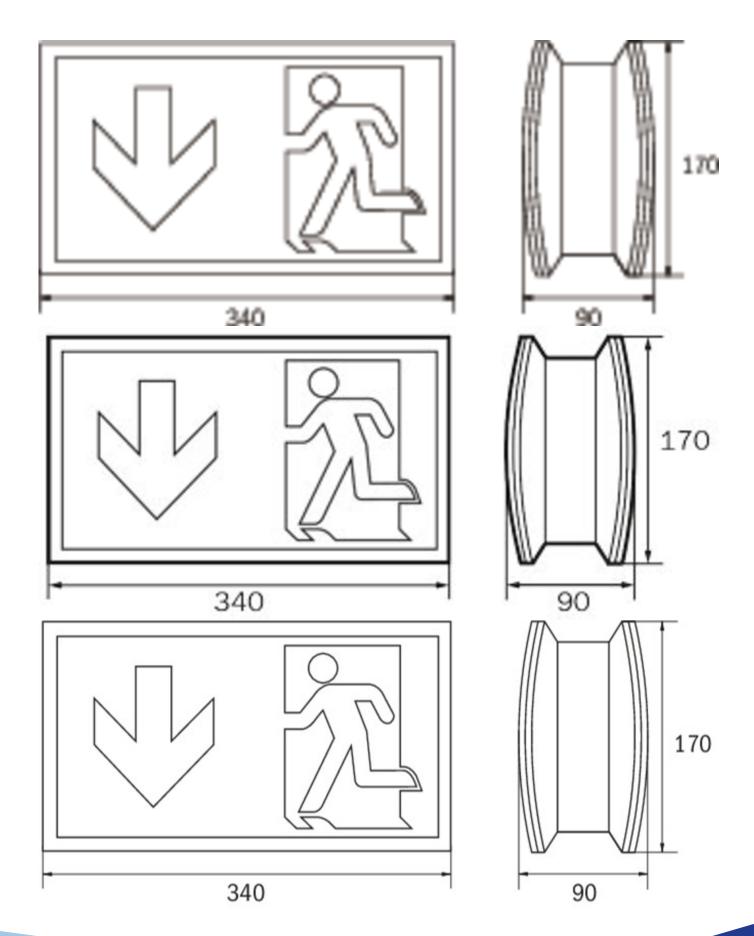





ACCESSORY LIST

KCAWW - Wall bracket

DSA - Wire suspension

2PW-EB - Pendant

WKL - Eye bolts

RELATED PRODUCTS

| ArtNo. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote main- tenance | max. luminai- res | Single luminai- re monitoring |
|----------|------------|---------------------------------|----------------|----------|------------|---------------|----------------------|-------------------------|----------------------|----------------------------------|
| KCD011 | ⅓ → | Without monitoring | | RAL 9003 | | | | | | |
| KCD011WL | ₹ | Wireless Pro- fessional (WL) | Single battery | RAL 9003 | €€ | yes | low | yes | 1,000 per system | central |

As of: 01.04.2025 - Subject to technical changes and errors.