



Art.-Nr: KCD418WL Exit sign Self-contained Surface mounting, Wireless Professional (WL), 8 h, 30 m, IP40, Polycarbonate, White

Slim convex plastic emergency exit sign luminaire for ceiling mounting. Suited to inscription on one or two sides. The plug-in set of pictograms is fitted on the inside without the use of solvents.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information www.rp-group.com/en/item/KCD418WL



TECHNICAL DATA

CE

Luminaire type	Exit sign				
Mounting	Surface mounting				
Recognition distance	30 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Polycarbonate				
Housing color	White				
Protection type (IP)	IP40				
Impact resistance (IK)	≥ 3				
Certification	WEEE, CE, 5 years warranty				
Insulation class	1				
Supply	Self-contained				
Monitoring	Wireless Professional (WL)				
Bridging time	8 h				
Battery	LiFePO4 6,4 V/3,3 Ah				
Operating mode	Non-maintained / maintained				
Input voltageAC	230 V				
Input frequency	50 Hz				
Power max.	5,5 W				





Power maintained	3,6 W				
Power non-maintained	0,7 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	90 mm				
Width	340 mm				
Height	170 mm				
Weight	1.09				
Weight incl. packaging	1.2				
Connection cross-section	2.5 mm ²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056120				
EAN	4260766552151				






TECHNICAL DRAWING





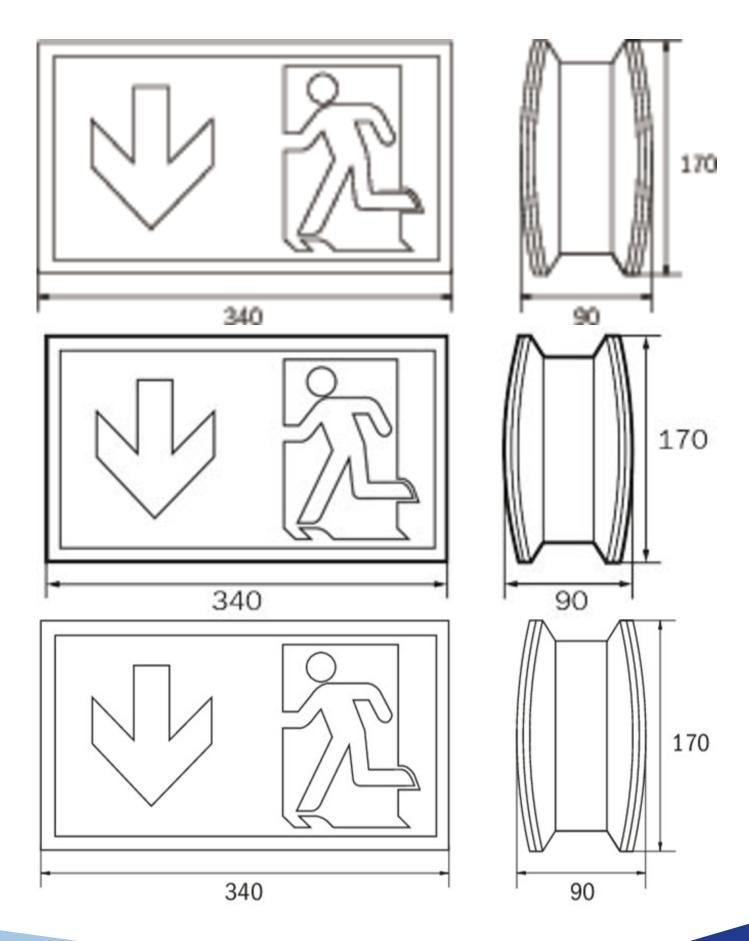

www.rp-group.com





ACCESSORY LIST

KCAWW - Wall bracket DSA - Wire suspension 2PW-EB - Pendant WKL - Eye bolts

RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring	
--------	-------	------------	--------	-------	------------	---------------	----------------------	-------------------------	----------------------	----------------------------------	--

As of: 20.03.2025 - Subject to technical changes and errors.