



# Art.-Nr: KCW001WL-IP64 Exit sign Self-contained Wall mounting, Wireless Professional (WL), 1 h, 30 m, IP64, Polycarbonate, White

Slim convex plastic luminaire.

Use as an emergency exit sign luminaire for wall mounting in which the set of plug-in pictograms is fitted on the inside without the use of solvents.

Or without the use of pictograms as a safety luminaire with the crystal-clear cover included, preferably for ceiling mounting.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/KCW001WL-



### **TECHNICAL DATA**

Luminaire type	Exit sign			
Mounting	Wall mounting			
Recognition distance	30 m			
Pictograph	Set			
Illuminant	LED			
Housing material	Polycarbonate			
Housing color	White			
Protection type (IP)	IP64			
Impact resistance (IK)	6			
Certification	WEEE, CE			
Insulation class	2			
Supply	Self-contained			
Monitoring	Wireless Professional (WL)			
Bridging time	1 h			
Battery	NIMH 4,8 V/2,0 Ah			
Operating mode	Non-maintained / maintained			






Input voltage AC	230 V			
Input frequency	50 / 60 Hz			
Input voltage DC	- V			
Power max.	5,3 W			
Power maintained	4,9 W			
Power non-maintained	3,5 W			
Ambient temperature maintained mode	-5 °C to 40 °C			
Ambient temperature non-maintained mode	-5 °C to 40 °C			
Depth	60 mm			
Width	340 mm			
Height	170 mm			
Weight	0.88			
Weight incl. packaging	0.97			
Connection cross-section	1.5 mm²			
Switching input	Yes			
Emergency light blocking	Yes			
Battery connection	Clip			
Dimming function	No			
Customs tariff number	94056120			
GTIN	4260682147066			





## **TECHNICAL DRAWING**

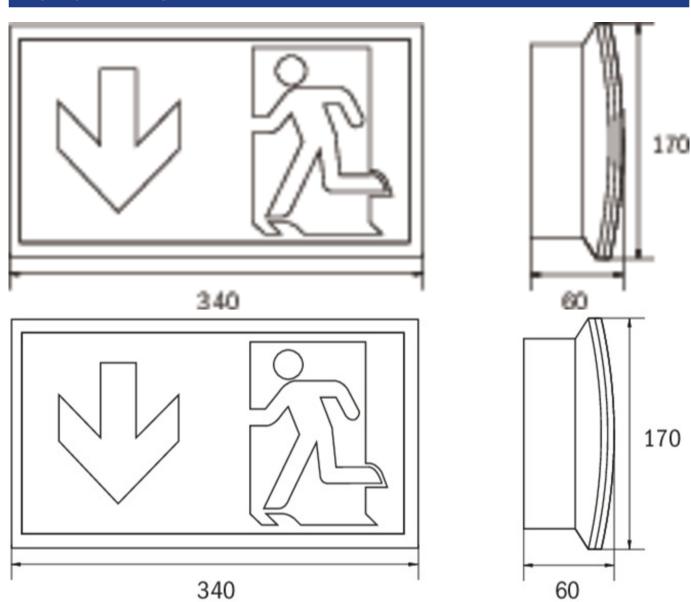

## **ACCESSORY LIST**

BALL2 - Wire mesh guard

DWKCW -

KC-IP65 -

KCER - Mounting frame

KCWFH - Wall holder





## RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
--------	-------	------------	--------	-------	------------	---------------	----------------------	-------------------------	----------------------	----------------------------------

As of: 05.09.2025 - Subject to technical changes and errors.