



# Art.-Nr: KCW013-EHE Exit sign Self-contained Wall mounting, Without monitoring, 3 h, 30 m, IP64, Polycarbonate, White

Slim convex plastic luminaire.

Use as an emergency exit sign luminaire for wall mounting in which the set of plug-in pictograms is fitted on the inside without the use of solvents.

Or without the use of pictograms as a safety luminaire with the crystal-clear cover included, preferably for ceiling mounting.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/KCW013-EHE



### **TECHNICAL DATA**

Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP64
Impact resistance (IK)	6
Certification	WEEE, CE
Insulation class	2
Supply	Self-contained
Monitoring	Without monitoring
Bridging time	3 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V






Input frequency	50 / 60 Hz			
Power max.	66,1 W			
Power maintained	4,5 W			
Power non-maintained	0,35 W			
Ambient temperature maintained mode	-5 °C to 40 °C			
Ambient temperature non-maintained mode	-15 °C to 40 °C			
Depth	60 mm			
Width	340 mm			
Height	170 mm			
Weight	0.82			
Weight incl. packaging	0.91			
Connection cross-section	2.5 mm²			
Switching input	Yes			
Emergency light blocking	Yes			
Battery connection	Connector			
Dimming function	Yes			
Luminous flux mains	220 lm			
Luminous flux emergency	150 lm			
Customs tariff number	94056120			
GTIN	4260682145086			





## **TECHNICAL DRAWING**

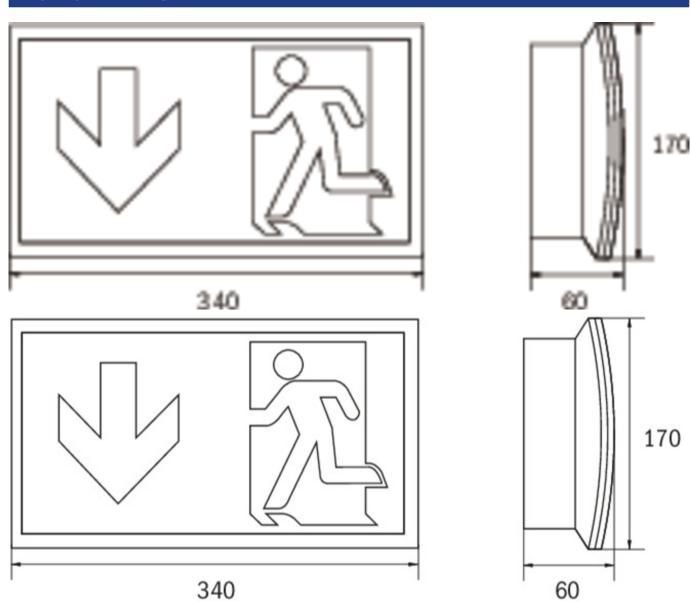

## **ACCESSORY LIST**

BALL2 - Wire mesh guard

DWKCW -

KC-IP65 -

KCER - Mounting frame

KCWFH - Wall holder





## RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KCW013SC- EHE	<b>₹</b>	SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KCW013WL- EHE	<b>₹</b>	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
KCW013WLSE -EHE	<b>₹</b> →	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 29.07.2025 - Subject to technical changes and errors.