



**Art.-Nr: KCW013WL-COOLIP54**  
**Exit sign Self-contained**  
**Wall mounting, Wireless Professional (WL), 3 h, 30 m,**  
**IP65/54, Polycarbonate, White**

Slightly curved high-grade exit sign and emergency luminaire in plastic for wall mounting. Signage with pluggable, solvent-free, internally mounted pictogram. Pictogram set included. This luminaire can be used without pictogram as an emergency lighting luminaire with a clear cover. Escape route/Exit sign/emergency luminaire according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.

The COOL light is equipped with an external battery housing for installation in the building. The installation of the lamp can be done outdoors or in cold stores.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/KCW013WL-COOLIP54](http://www.rp-group.com/en/item/KCW013WL-COOLIP54)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65/54
Impact resistance (IK)	6
Certification	WEEE, CE
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	NIMH 12 V/0,8 Ah



Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	7,5 W
Power maintained	7,5 W
Power non-maintained	3,6 W
Ambient temperature maintained mode	-25 °C to 40 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	60 mm
Width	340 mm
Height	170 mm
Weight	1
Weight incl. packaging	1.09
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Clip
Dimming function	Yes
Luminous flux mains	150 lm
Luminous flux emergency	150 lm
Customs tariff number	94056120
EAN	4260581719159



## TECHNICAL DRAWING

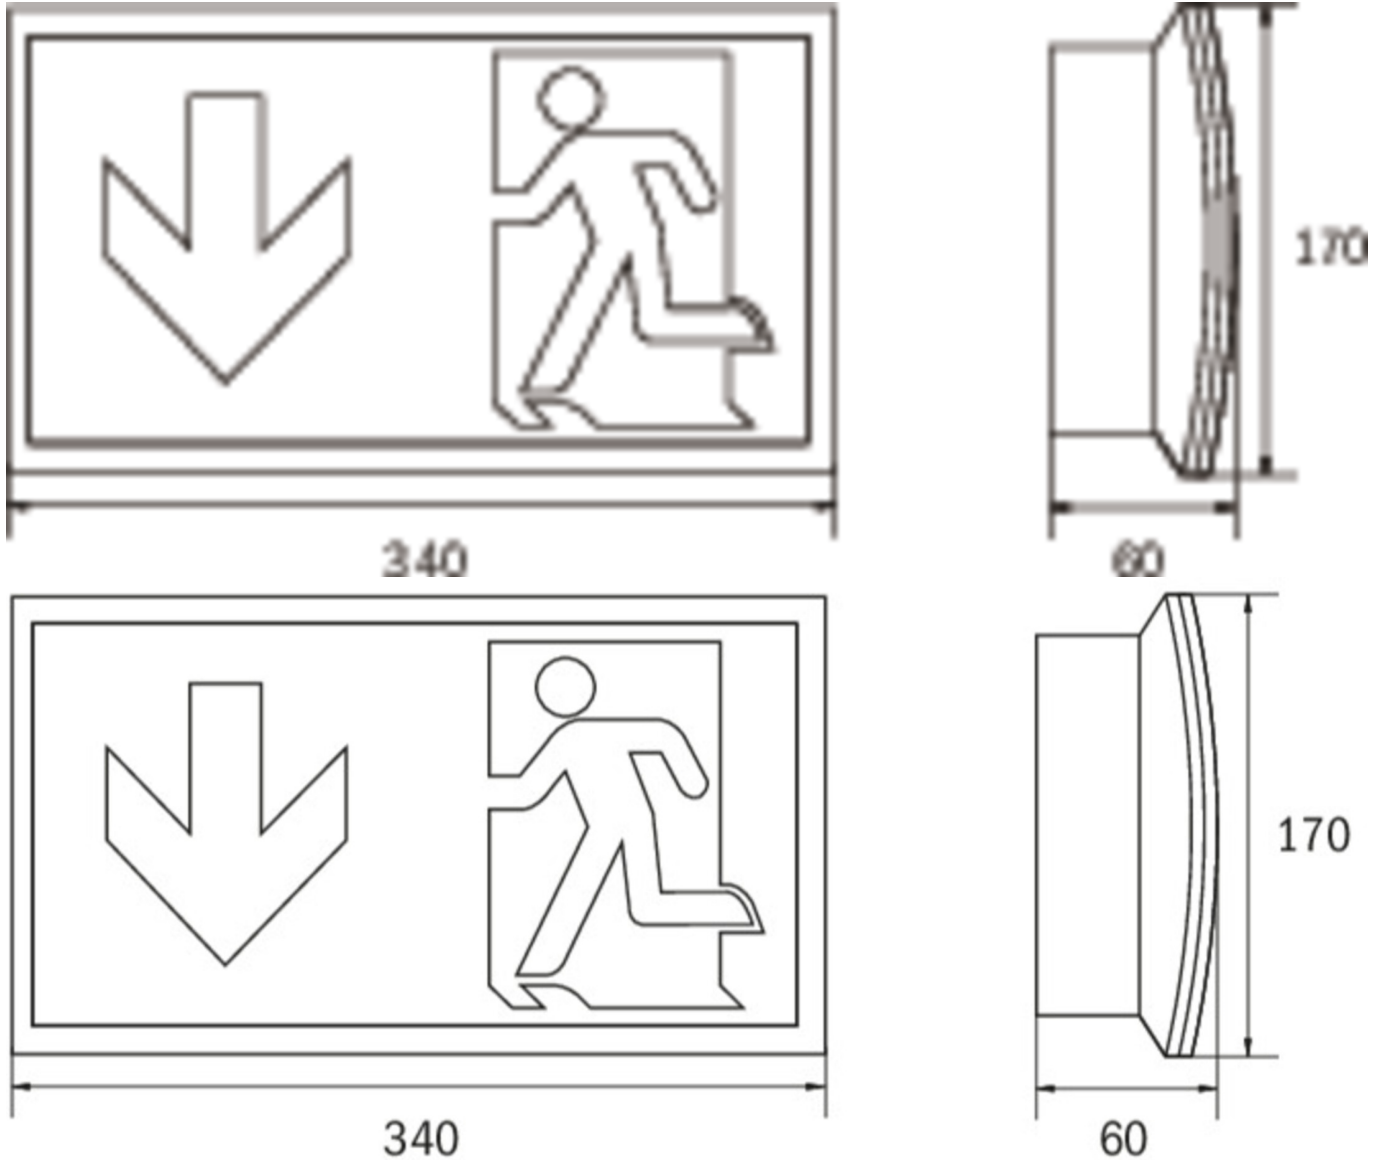

## ACCESSORY LIST

- BALL2 - Wire mesh guard
- DWKCW -
- KC-IP65 -
- KCER - Mounting frame
- KCWFH - Wall holder
- NIMH1208P - Battery



## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KCW013-COOLIP54		Without monitoring		RAL 9003						
KCW013SC-COOLIP54		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KCW013WLSE-COOLIP54		Wireless Professional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 27.05.2025 - Subject to technical changes and errors.