



**Art.-Nr: KCW019-IP65**

**Exit sign, Emergency light Centralised power supply systems  
Wall mounting, Without monitoring, CPS, 30 m, IP65,  
Polycarbonate, White**

Slim convex plastic luminaire.

Use as an emergency exit sign luminaire for wall mounting in which the set of plug-in pictograms is fitted on the inside without the use of solvents.

Or without the use of pictograms as a safety luminaire with the crystal-clear cover included, preferably for ceiling mounting.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/KCW019-IP65](http://www.rp-group.com/en/item/KCW019-IP65)



## TECHNICAL DATA


Luminaire type	Exit sign, Emergency light
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltageAC	230 V



Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,2 W
Power maintained	4,2 W
Power non-maintained	0 W
Ambient temperature maintained mode	-25 °C to 40 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	60 mm
Width	340 mm
Height	170 mm
Weight	0.66
Weight incl. packaging	0.75
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	335 lm
Luminous flux emergency	335 lm
Customs tariff number	94056120
EAN	4260349829267



## TECHNICAL DRAWING

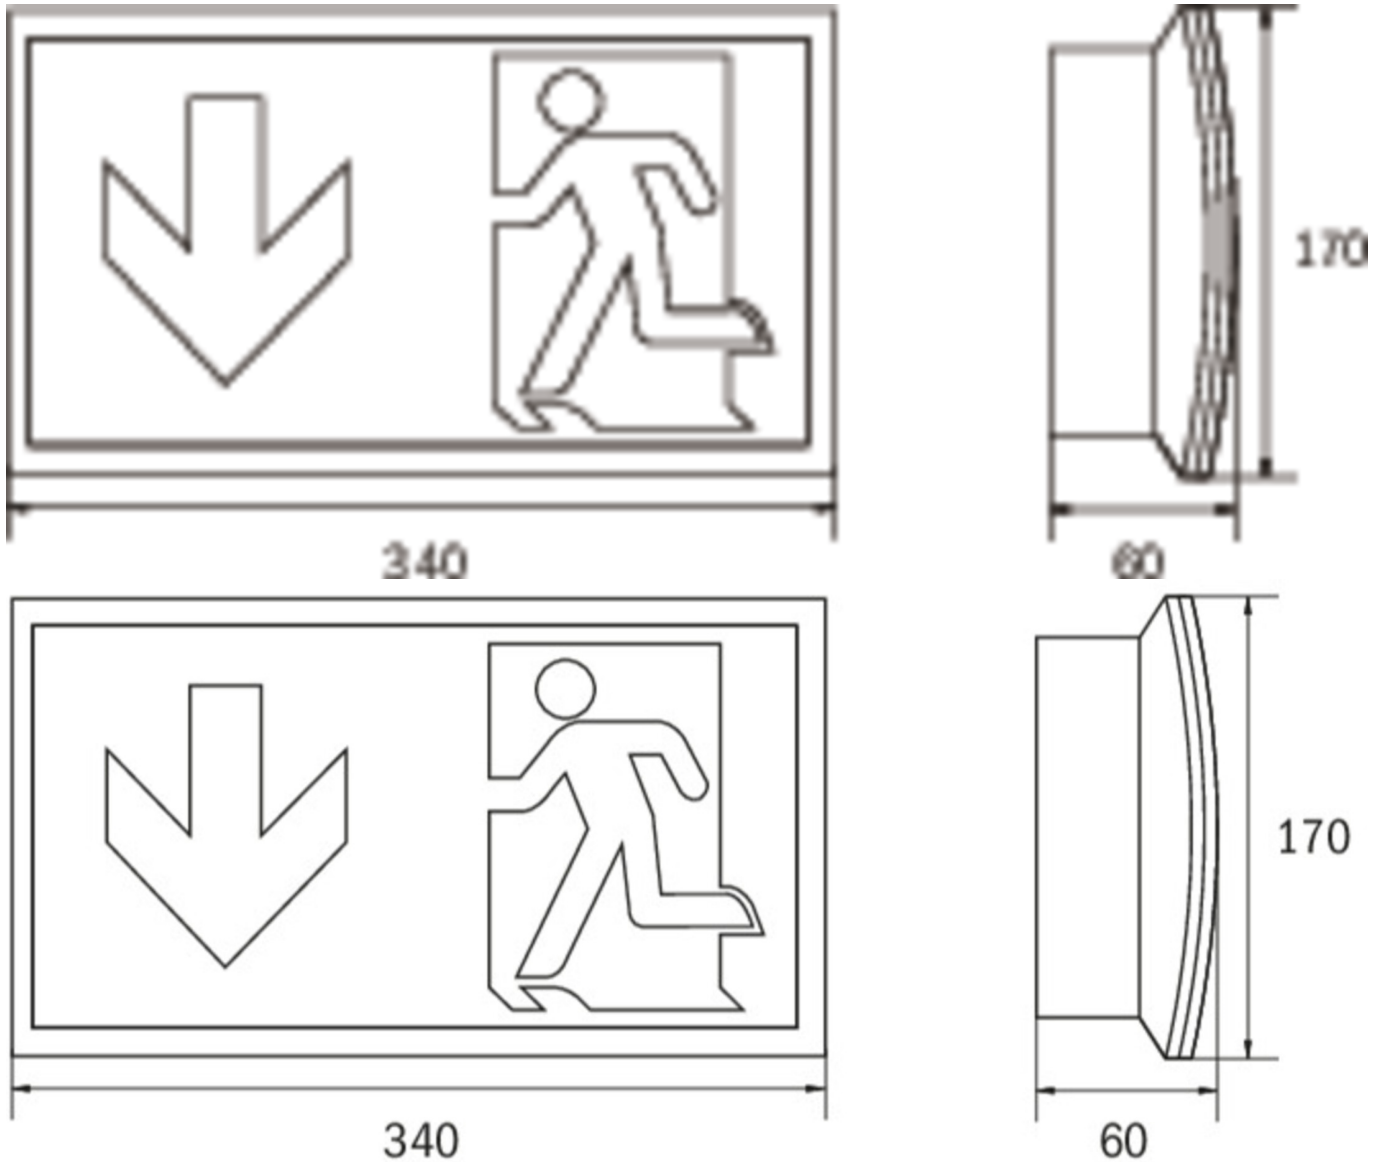

## ACCESSORY LIST

BALL2 - Wire mesh guard  
DWKCW -  
KC-IP65 -  
KCER - Mounting frame  
KCWFH - Wall holder

As of: 15.04.2025 - Subject to technical changes and errors.