



Exit sign/emergency luminaire Art.-No.: KCW019ML

Slightly curved high-grade exit sign and emergency luminaire in polycarbonate for wall mounting. Signage with pluggable, solvent-free, internally mounted pictogram. Pictogram set included. This luminaire can be used without pictogram as an emergency lighting luminaire with a clear cover. Escape route/Exit sign/ emergency luminaire according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.




TECHNICAL DATA

| | |
|---|----------------------------------|
| Luminaire type | Exit sign / ER-light |
| Mounting | Wall mounted |
| Viewing distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Colour | RAL 9003 |
| Mechanical rating IP | 54 |
| Impact resistance IK | 6 |
| Protection class | 2 |
| Supply | Central power supply system |
| Monitoring | ML - Central power supply system |
| Operation time | CPS |
| Operation mode | single luminaire switching |
| Input Voltage AC | 230 V |
| Input Frequency Hz | 50 / 60 Hz |
| Input Voltage DC | 216 V |
| Power consumption max. | 5,2 W |
| Power consumption maintained | 5,2 W |
| Power consumption non-maintained | 1,1 W |
| Ambient temperature maintained mode | -20 °C / 40 °C |
| Ambient temperature non-maintained mode | -20 °C / 40 °C |
| Length | 60 mm |
| Width | 340 mm |



| | |
|------------------------------|---------------|
| Height | 170 mm |
| Weight | 0.7 kg |
| Weight incl. Packaging | 0.79 kg |
| Connection cross-section | 2.5 mm |
| Switching input L' | Yes |
| Emergency light blocking | No |
| Battery connector | None |
| Dimming function | Yes |
| Luminous flux mains mode | 300 lm |
| Luminous flux emergency mode | 300 lm |
| Customs tariff number | 94056120 |
| Country of origin | Germany |
| EAN | 4260123681555 |

TECHNICAL DRAWING

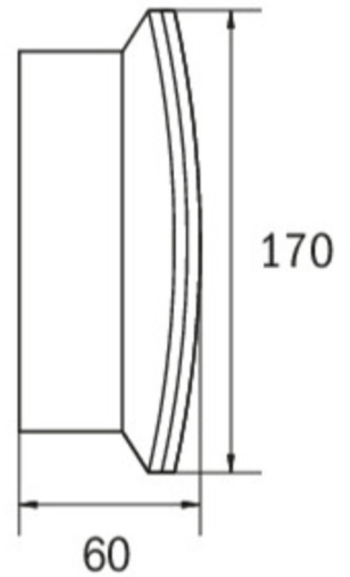



ACCESSORIES

BALL2 - Ball protection (8W) 450x280x125mm

DWKCW - ceiling bracket KC wall

KC-IP65 - KC gasket IP65 EPDM

KCER - KCW recessed frame

KCWFH - flexible wall mounting for KCW