



**Art.-Nr: KCW019ML**  
**Exit sign Centralised power supply systems**  
**Wall mounting, Central power supply (ML), CPS, , IP54,**  
**Polycarbonate, White**

Slim convex plastic luminaire.

Use as an emergency exit sign luminaire for wall mounting in which the set of plug-in pictograms is fitted on the inside without the use of solvents.

Or without the use of pictograms as a safety luminaire with the crystal-clear cover included, preferably for ceiling mounting.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information  
[www.rp-group.com/en/item/KCW019ML](http://www.rp-group.com/en/item/KCW019ML)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP54
Impact resistance (IK)	6
Certification	WEEE, CE, TÜV Rheinland Type approved, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltage AC	230 V



Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	5,2 W
Power maintained	5,2 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	60 mm
Width	340 mm
Height	170 mm
Weight	0.7
Weight incl. packaging	0.79
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	300 lm
Luminous flux emergency	300 lm
Customs tariff number	94056120
GTIN	4260123681555



## TECHNICAL DRAWING

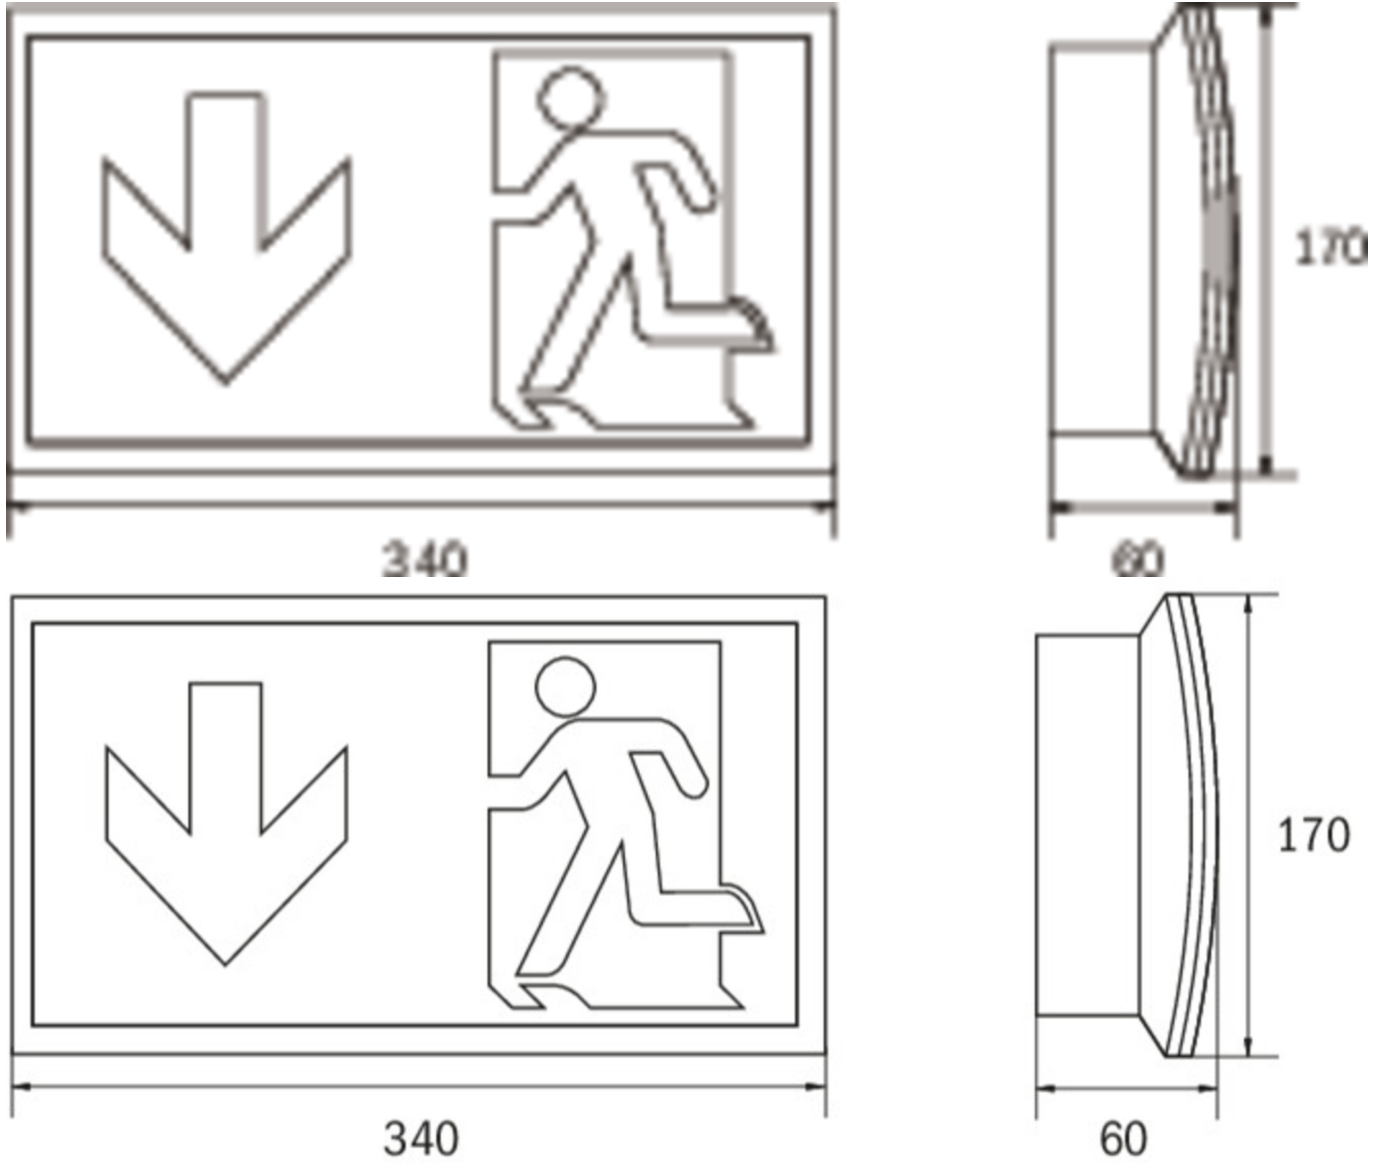

## ACCESSORY LIST

- BALL2 - Wire mesh guard
- DWKCW -
- KC-IP65 -
- KCER - Mounting frame
- KCWFH - Wall holder



## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KCW019ML-COOL		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
KCW019ML-P		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
KCW519CC		CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central

As of: 15.12.2025 - Subject to technical changes and errors.