



Emergency luminaire Art.-No.: KCW029-IP64

Slightly curved high-grade emergency luminaire in polycarbonate for wall or ceiling mounting.

Emergency luminaire according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.




TECHNICAL DATA

| | |
|---|-----------------------------|
| Luminaire type | Emergency luminaire |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Colour | RAL 9003 |
| Mechanical rating IP | 64 |
| Impact resistance IK | 6 |
| Protection class | 2 |
| Supply | Central power supply system |
| Monitoring | None |
| Operation time | CPS |
| Operation mode | Maintained mode |
| Input Voltage AC | 230 V |
| Input Frequency Hz | 50 / 60 Hz |
| Input Voltage DC | 100-254 V |
| Power consumption max. | 4,6 W |
| Power consumption maintained | 4,6 W |
| Power consumption non-maintained | 0 W |
| Ambient temperature maintained mode | -20 °C / 40 °C |
| Ambient temperature non-maintained mode | -20 °C / 40 °C |
| Length | 60 mm |
| Width | 340 mm |
| Height | 170 mm |
| Weight | 0.69 kg |



| | |
|------------------------------|---------------|
| Weight incl. Packaging | 0.78 kg |
| Connection cross-section | 1.5 mm |
| Switching input L' | No |
| Emergency light blocking | No |
| Battery connector | None |
| Dimming function | No |
| Luminous flux mains mode | 520 lm |
| Luminous flux emergency mode | 520 lm |
| Customs tariff number | 94056120 |
| Country of origin | Germany |
| EAN | 4260581712839 |

TECHNICAL DRAWING

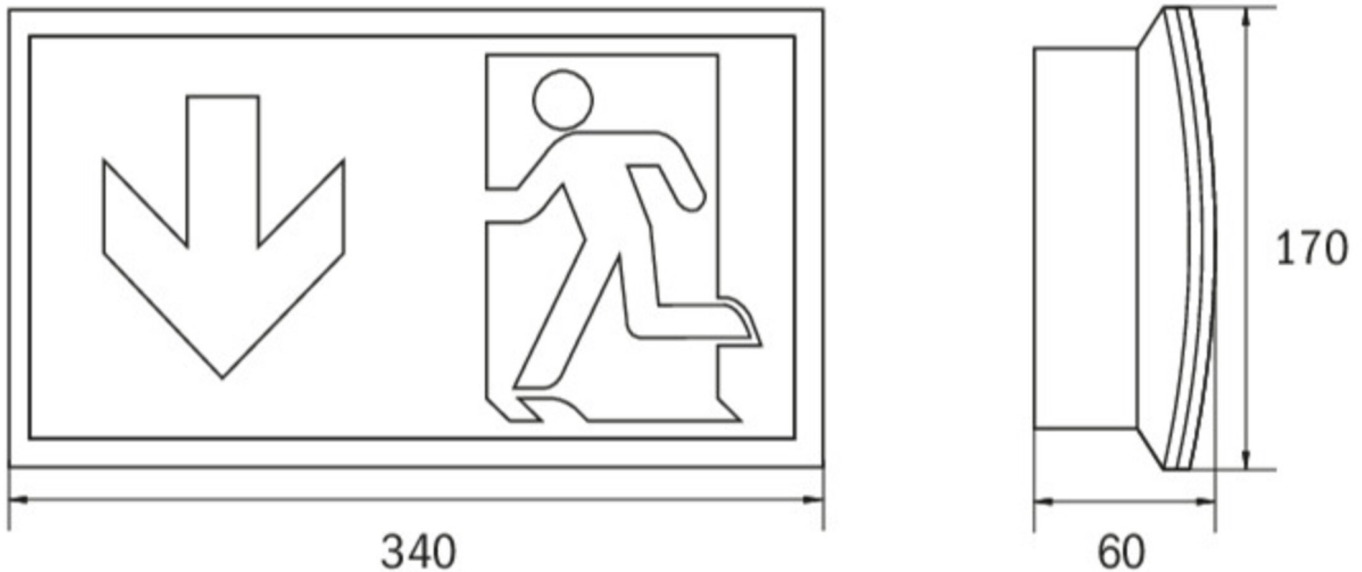

ACCESSORIES

- BALL2 - Ball protection (8W) 450x280x125mm
- DWKCW - ceiling bracket KC wall
- KC-IP65 - KC gasket IP65 EPDM
- KCER - KCW recessed frame
- KCW FH - flexible wall mounting for KCW