



Art.-Nr: KCW029ML-P Emergency light Centralised power supply systems Universal, Central power supply (ML), CPS, 30 m, IP54, Polycarbonate, White

Slim convex luminaire out of of polycarbonate.

As safety luminaire for escape route lighting with a clear cover preferably for ceiling mounting.

Control and monitoring via central power supply system. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.





More information
www.rp-group.com/en/item/KCW029ML-P



TECHNICAL DATA


Luminaire type	Emergency light
Mounting	Universal
Recognition distance	30 m
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP54
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V






Power max.	5,2 W				
Power maintained	5,2 W				
Power non-maintained	1,1 W				
Ambient temperature maintained mode	-20 °C to 40 °C				
Ambient temperature non-maintained mode	-20 °C to 40 °C				
Depth	60 mm				
Width	340 mm				
Height	170 mm				
Weight	0.72				
Weight incl. packaging	0.81				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	No				
Battery connection	No				
Dimming function	Yes				
Luminous flux mains	520 lm				
Luminous flux emergency	520 lm				
Customs tariff number	94056120				
EAN	4260123683726				

TECHNICAL DRAWING

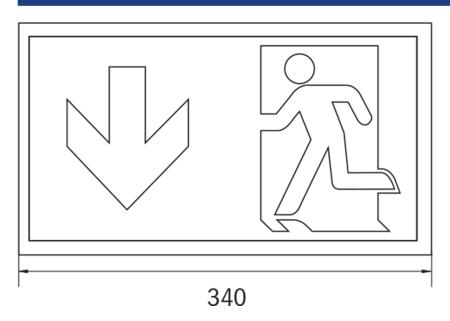







ACCESSORY LIST

BALL2 - Wire mesh guard

DWKCW -

KC-IP65 -

KCER - Mounting frame

KCWFH - Wall holder

RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KCW029ML	1.11	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
KCW029ML- COOL	w. a	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
KCW529CC	u. a	CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central
KCW529CC- COOL	w a	CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central
KCW529CC-P	LU O	CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central

As of: 15.04.2025 - Subject to technical changes and errors.