



Art.-Nr: KCW519CC-P
Emergency light Centralised power supply systems
Wall mounting, CoreCompact 24 (CC), CPS, 30 m, IP54,
Polycarbonate, White

Slightly curved high-grade emergency luminaire in polycarbonate for wall or ceiling mounting.

Emergency luminaire according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information
www.rp-group.com/en/item/KCW519CC-P



TECHNICAL DATA


Luminaire type	Emergency light
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP54
Impact resistance (IK)	6
Certification	WEEE, CE
Insulation class	3
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltageAC	24 V
Power max.	4,2 W



Power maintained	4,2 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	60 mm
Width	340 mm
Height	170 mm
Weight	0.62
Weight incl. packaging	0.71
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	335 lm
Luminous flux emergency	335 lm
Customs tariff number	94056120
EAN	4260682157294



TECHNICAL DRAWING

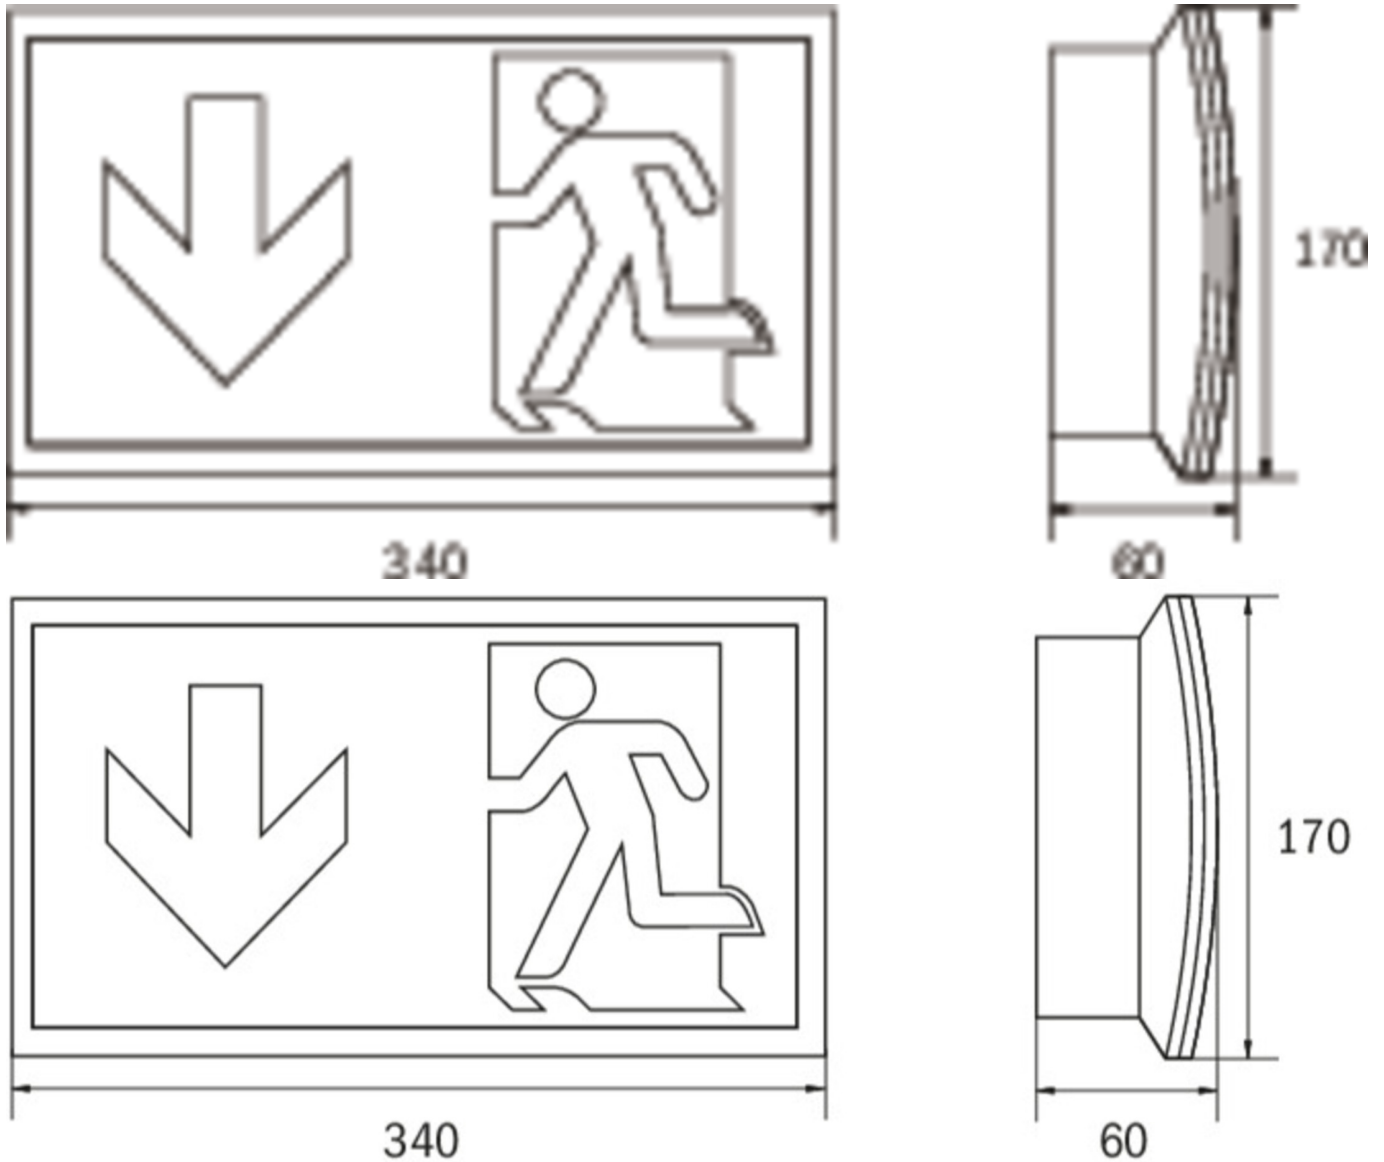

ACCESSORY LIST

BALL2 - Wire mesh guard
DWKCW -
KC-IP65 -
KCER - Mounting frame
KCWFH - Wall holder

As of: 15.04.2025 - Subject to technical changes and errors.