



### Art.-Nr: KCW529CC-P-IP64 Emergency light Centralised power supply systems Universal, CoreCompact 24 (CC), CPS, , IP64, Polycarbonate, White

Slim convex luminaire out of of polycarbonate.

As safety luminaire for escape route lighting with a clear cover preferably for ceiling mounting.

Control and monitoring via central 24 V low-power system. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



( (

More information www.rp-group.com/en/item/KCW529CC-P-IP64



### **TECHNICAL DATA**


Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP64
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign
Insulation class	3
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltageAC	24 V
Power max.	5,1 W
Power maintained	5,1 W
Power non-maintained	0,4 W






Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	60 mm
Width	340 mm
Height	170 mm
Weight	0.65
Weight incl. packaging	0.74
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
EAN	4260682157362

# TECHNICAL DRAWING

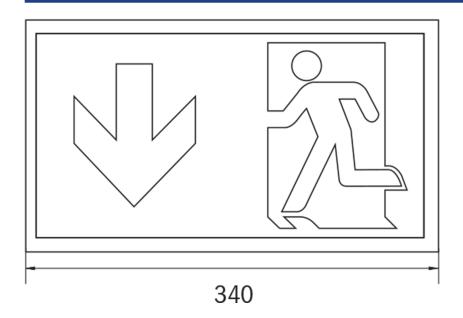







# ACCESSORY LIST

BALL2 - Wire mesh guard

DWKCW -

KC-IP65 -

KCER - Mounting frame

KCWFH - Wall holder

# RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KCW029ML- IP64	1.11	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
KCW029ML-P- IP64	w. a	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
KCW529CC- IP64	LU O	CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central
KCW529CC- IP65	u. a	CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central

As of: 15.04.2025 - Subject to technical changes and errors.