



Emergency luminaire Art.-No.: KEU011WL

Compact polycarbonate luminaire with ERT-LED for universal mounting and for the lighting of escape and rescue routes according to DIN EN 605981, DIN EN 60598-2-22 and EN 1838. Available for central power systems or as a self-contained luminaire. Also available as ERT luminaire with improved illumination. Plastic, white, IP40 Universal mounting (incl.: wall (W), ceiling (D), wall bracket)




TECHNICAL DATA

Luminaire type	Emergency luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Colour	RAL 9003
Mechanical rating IP	40
Impact resistance IK	≥ 3
Protection class	2
Supply	Single battery
Monitoring	WL - Wireless Professional
Operation time	1 h
Battery	12V/0,8Ah NiMH
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	- V
Power consumption max.	7,5 W
Power consumption maintained	7,5 W
Power consumption non-maintained	3,6 W
Ambient temperature maintained mode	-5 °C / 40 °C
Ambient temperature non-maintained mode	-5 °C / 40 °C
Length	332 mm
Width	48 mm



Height	72 mm
Weight	0.67 kg
Weight incl. Packaging	0.71 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	Clamp
Dimming function	Yes
Luminous flux mains mode	150 lm
Luminous flux emergency mode	150 lm
Customs tariff number	94056120
Coutry of origin	Germany
EAN	4260581719654

TECHNICAL DRAWING

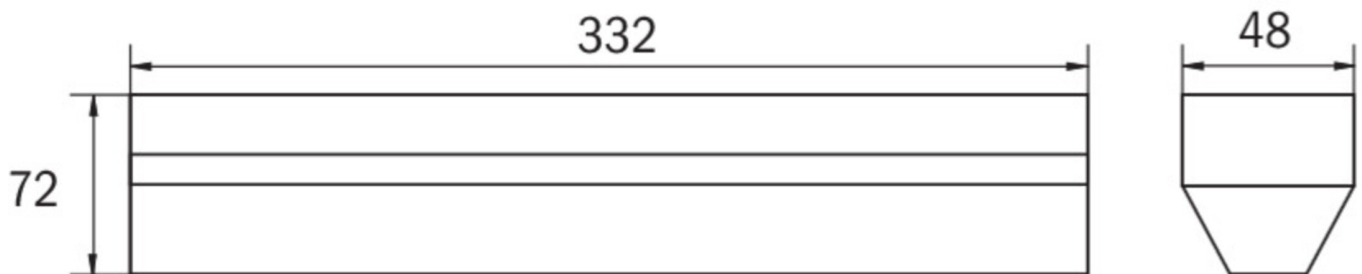

ACCESSORIES

- DSA - cord suspension set 1,5m
- KEE-EB - KE recessed frame with test button self-contained
- 2PW-EB -
- 2DW-EB -
- KXBE - KX concrete box 01+02