



Art.-Nr: KEU018SC Emergency light Self-contained Universal, SelfControl (SC), 8 h, , IP40, Polycarbonate, White

Compact plastic safety luminaire for universal mounting for illuminating escape and emergency routes.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



 ϵ

More information www.rp-group.com/en/item/KEU018SC




TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	NIMH 9,6 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Power max.	7,1 W
Power maintained	4,6 W





Power non-maintained0,35 WAmbient temperature maintained mode-5 °C to 40 °CDepth332 mmWidth48 mmHeight72 mmWeight incl. packaging0.63Connection cross-section2.5 mm²Switching inputYesEmergency light blockingYesBattery connectionConnectorDimming functionYesLuminous flux mains430 lmLuminous flux emergency220 lmGTIN4260123687137		
Ambient temperature non-maintained mode -5 °C to 40 °C Depth 332 mm Width 48 mm Height 72 mm Weight 0.63 Weight incl. packaging 0.67 Connection cross-section 2.5 mm² Switching input Yes Emergency light blocking Yes Battery connection Connector Dimming function Yes Luminous flux mains 430 lm Luminous flux emergency Customs tariff number 94056120	Power non-maintained	0,35 W
Depth 332 mm Width 48 mm Height 72 mm Weight 0.63 Weight incl. packaging 0.67 Connection cross-section 2.5 mm² Switching input Yes Emergency light blocking Yes Battery connection Connector Dimming function Yes Luminous flux mains 430 lm Luminous flux emergency 220 lm Customs tariff number 94056120	Ambient temperature maintained mode	-5 °C to 40 °C
Width 48 mm Height 72 mm Weight 0.63 Weight incl. packaging 0.67 Connection cross-section 2.5 mm² Switching input Yes Emergency light blocking Yes Battery connection Connector Dimming function Yes Luminous flux mains 430 lm Luminous flux emergency 220 lm Customs tariff number 94056120	Ambient temperature non-maintained mode	-5 °C to 40 °C
Height 72 mm Weight 0.63 Weight incl. packaging 0.67 Connection cross-section 2.5 mm² Switching input Yes Emergency light blocking Yes Battery connection Connector Dimming function Yes Luminous flux mains 430 lm Luminous flux emergency 220 lm Customs tariff number 94056120	Depth	332 mm
Weight 0.63 Weight incl. packaging 0.67 Connection cross-section 2.5 mm² Switching input Yes Emergency light blocking Yes Battery connection Connector Dimming function Yes Luminous flux mains 430 lm Luminous flux emergency 220 lm Customs tariff number 94056120	Width	48 mm
Weight incl. packaging Connection cross-section 2.5 mm² Switching input Yes Emergency light blocking Pattery connection Connector Dimming function Luminous flux mains Luminous flux emergency Customs tariff number One 0.67 2.5 mm² Yes Yes Lonnector Connector Yes Luminous flux mains 430 lm 220 lm 94056120	Height	72 mm
Connection cross-section 2.5 mm² Switching input Yes Emergency light blocking Yes Battery connection Connector Dimming function Yes Luminous flux mains 430 lm Luminous flux emergency 220 lm Customs tariff number 94056120	Weight	0.63
Switching input Yes Emergency light blocking Yes Battery connection Connector Dimming function Yes Luminous flux mains 430 lm Luminous flux emergency 220 lm Customs tariff number 94056120	Weight incl. packaging	0.67
Emergency light blocking Battery connection Connector Dimming function Yes Luminous flux mains 430 Im Luminous flux emergency 220 Im Customs tariff number 94056120	Connection cross-section	2.5 mm²
Battery connection Connector Dimming function Yes Luminous flux mains 430 lm Luminous flux emergency 220 lm Customs tariff number 94056120	Switching input	Yes
Dimming function Yes Luminous flux mains 430 Im Luminous flux emergency 220 Im Customs tariff number 94056120	Emergency light blocking	Yes
Luminous flux mains430 lmLuminous flux emergency220 lmCustoms tariff number94056120	Battery connection	Connector
Luminous flux emergency 220 lm Customs tariff number 94056120	Dimming function	Yes
Customs tariff number 94056120	Luminous flux mains	430 lm
	Luminous flux emergency	220 lm
GTIN 4260123687137	Customs tariff number	94056120
	GTIN	4260123687137

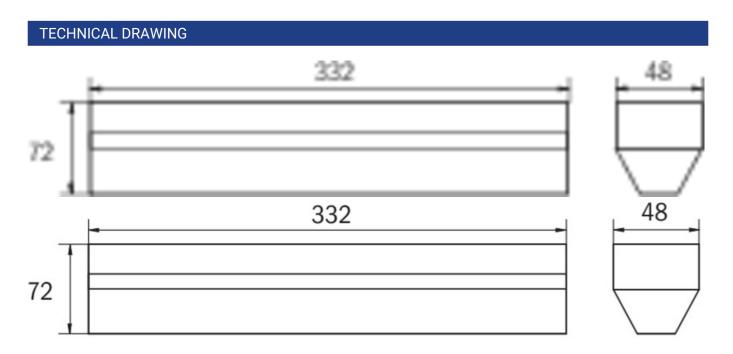





ACCESSORY LIST

DSA - Wire suspension

KEE-EB -

2PW-EB - Pendant

2DW-EB -

KXBE -

NIMHHT4820Q - Battery

RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KEU018		Without monitoring		RAL 9003						
KEU018BC		Bus control		RAL 9003						
KEU018WL		Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 20.09.2025 - Subject to technical changes and errors.