



Art.-Nr: KEU019ML **Emergency light Centralised power supply systems** Universal, Central power supply (ML), CPS, , IP40, Polycarbonate, White

Compact plastic safety luminaire for universal mounting for illuminating escape and emergency routes.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

Control and monitoring via central power supply system. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.














TECHNICAL DATA

Luminaire type	Emergency light				
Mounting	Universal				
Pictograph	No				
Illuminant	LED				
Housing material	Polycarbonate				
Housing color	White				
Protection type (IP)	IP40				
Impact resistance (IK)	≥ 3				
Certification	WEEE, CE, TÜV Rheinland Type approved, ENEC				
Insulation class	2				
Supply	Centralised power supply systems				
Monitoring	Central power supply (ML)				
Bridging time	CPS				
Battery	/				
Operating mode	single luminaire switching				
Input voltage AC	230 V				
Input frequency	50 / 60 Hz				
Input voltage DC	216 V				





Power max.	5,2 W				
Power maintained	5,2 W				
Power non-maintained	1,1 W				
Ambient temperature maintained mode	-20 °C to 40 °C				
Ambient temperature non-maintained mode	-20 °C to 40 °C				
Depth	332 mm				
Width	48 mm				
Height	72 mm				
Weight	0.37				
Weight incl. packaging	0.41				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	No				
Battery connection	No				
Dimming function	Yes				
Luminous flux mains	300 lm				
Luminous flux emergency	300 lm				
Customs tariff number	94056120				
GTIN	4260123687113				

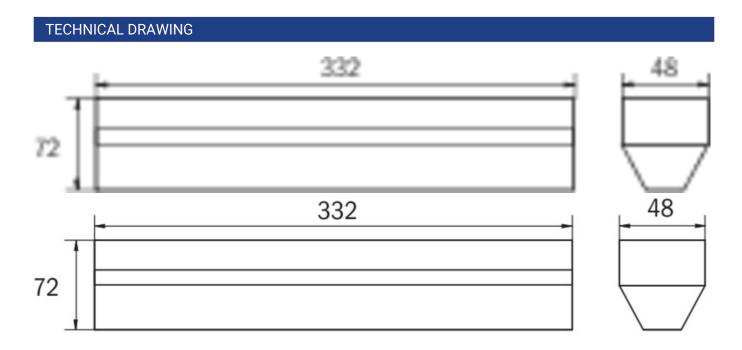





ACCESSORY LIST

DSA - Wire suspension

KEE-EB -

2PW-EB - Pendant

2DW-EB -

KXBE -

RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
--------	-------	------------	--------	-------	------------	---------------	----------------------	-------------------------	----------------------	----------------------------------

As of: 15.12.2025 - Subject to technical changes and errors.