



**Art.-Nr: KFMU509CC**

**Exit sign**

**Universal, CoreCompact 24 (CC), CPS, 20 m, IP40,  
Polycarbonate, White**

Slim and elegant emergency exit sign luminaire with convex, clear, closed surround, which tapers downwards in a continuous and symmetrical manner. Suited to universal mounting, i.e. fitting on a wall and ceiling, as well as for inscription on one or two sides. The pictograms are on the inside and are inserted without the use of solvents.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.



More information

[www.rp-group.com/en/item/KFMU509CC](http://www.rp-group.com/en/item/KFMU509CC)




## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	20 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	5
Certification	CE, WEEE
Insulation class	3
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Power max.	2,00 W
Power maintained	2,00 W
Power non-maintained	0,4 W



Ambient temperature maintained mode	-30 °C to 40 °C
Ambient temperature non-maintained mode	-30 °C to 40 °C
Depth	212 mm
Width	31 mm
Height	141 mm
Weight	0.25
Weight incl. packaging	0.35
Customs tariff number	94056180
GTIN	4260766558528

## TECHNICAL DRAWING

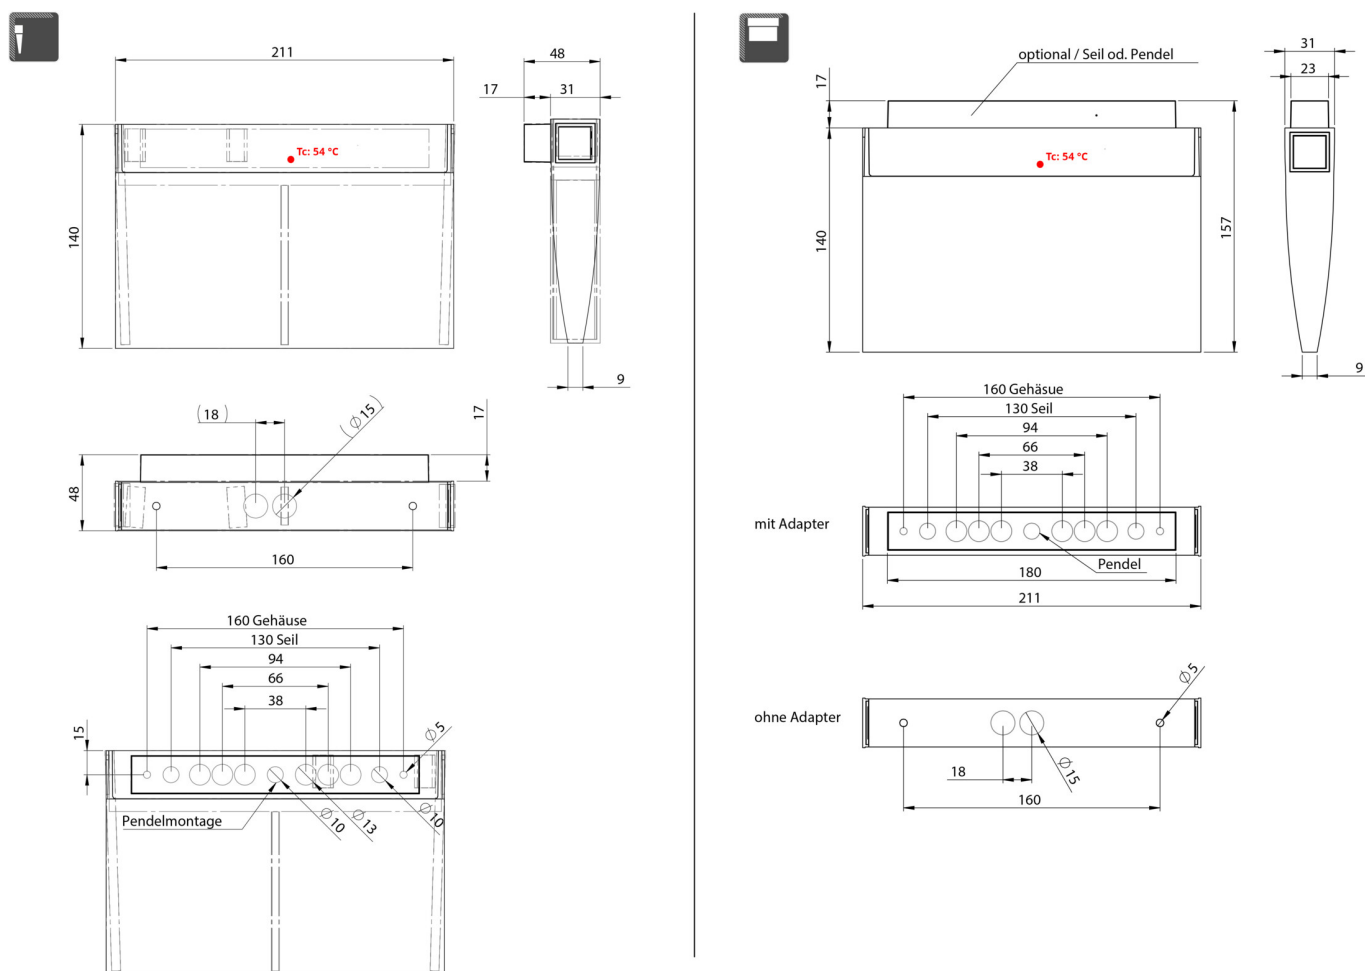

As of: 04.07.2025 - Subject to technical changes and errors.