



## Emergency luminaire Art.-No.: KMB013WL-SW

Compact emergency luminaire for the illumination of escape and rescue routes with prismatic cover for optimized light distribution. This is made possible by the with High-Power SMD LEDs which also have an really long live span of around 50000 h. These luminaires are available for central battery systems or as a selfcontained luminaire. The optional recessed mounting frame hides the luminaire elegantly within the ceiling.

Housing color in black RAL 9005




### TECHNICAL DATA

Luminaire type	Emergency luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Colour	RAL 9005
Mechanical rating IP	54
Impact resistance IK	≥ 3
Protection class	2
Supply	Single battery
Monitoring	WL - Wireless Professional
Operation time	3 h
Battery	3.2V / 3.3 Ah LiFePO4
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	- V
Power consumption max.	5,3 W
Power consumption maintained	3,9 W
Power consumption non-maintained	1,5 W
Ambient temperature maintained mode	-10 °C / 40 °C
Ambient temperature non-maintained mode	-5 °C / 40 °C
Length	250 mm
Width	34 mm



Height	50 mm
Weight	0.58 kg
Weight incl. Packaging	0.65 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	Plug
Dimming function	No
Luminous flux mains mode	190 lm
Luminous flux emergency mode	190 lm
Customs tariff number	94056120
Country of origin	Germany
EAN	4260682159410

## TECHNICAL DRAWING

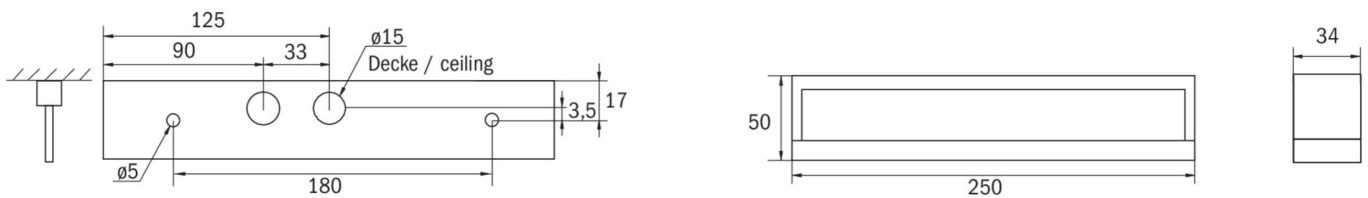

## ACCESSORIES

- KME-EB - KM recessed frame with test button (SB)
- BALL1 - Ball protection (6W) 320x220x120mm
- KMBE - concrete recessed housing
- BALLPLX-KMB - Ball protection 380x150x60mm incl. fastening
- KMBFH - flexible wall mounting for KM