



Art.-Nr: KMB413WL-TT-SW
Emergency light Self-contained
Universal, Wireless Professional (WL), 3 h, , IP54,
Polycarbonate, Black

Compact safety luminaire to illuminate escape and emergency routes with prismatic cover for optimum light distribution. This is possible thanks to the white high-power SMD LEDs, which also have a long life of around 50,000 hours. Available to connect to central battery systems and as a single-battery luminaire. When fitted with the optional installation frame, the luminaire can be elegantly countersunk into the ceiling.

Housing colour: RAL 9005 black

Wireless central control and monitoring for large installations of up to 50,000 luminaires with **Wireless Professional**. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available. The designation "**TT**" stands for **low-temperature batteries**. These special **lithium iron phosphate batteries** are designed to function reliably even at low temperatures. They offer stable performance and a long lifespan, even under demanding conditions.



More information

www.rp-group.com/en/item/KMB413WL-TT-SW




TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Black
Protection type (IP)	IP54
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, 5 years warranty
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah



Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	5,3 W
Power maintained	3,9 W
Power non-maintained	1,5 W
Ambient temperature maintained mode	-15 °C to 40 °C
Ambient temperature non-maintained mode	-15 °C to 40 °C
Depth	250 mm
Width	34 mm
Height	50 mm
Weight	0.58
Weight incl. packaging	0.65
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	190 lm
Customs tariff number	94056180
EAN	4262483024003

TECHNICAL DRAWING

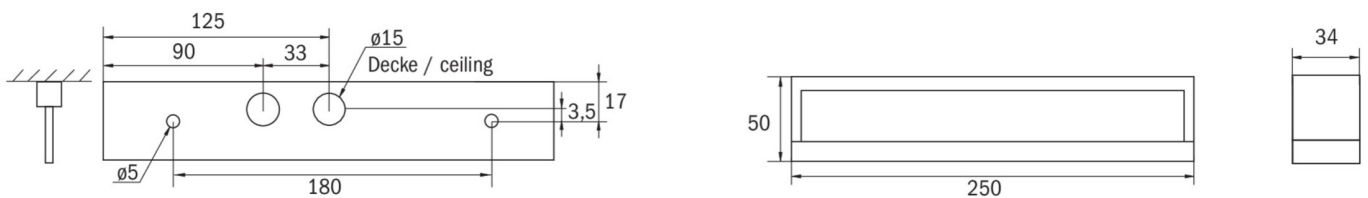



ACCESSORY LIST

KME-EB - Mounting frame

BALL1 - Wire mesh guard

KMBE - Concrete-mounted box

BALLPLX-KMB - Wire mesh surround

KMBFH -

As of: 29.04.2025 - Subject to technical changes and errors.