



**Art.-Nr: KMB519CC**

**Emergency light Centralised power supply systems  
Universal, CoreCompact 24 (CC), CPS, , IP54, Polycarbonate,  
White**

Compact safety luminaire for universal mounting. The narrow rectangular plastic housing is discreetly reduced to the essentials. Illumination of the escape and emergency routes is assisted by the optics integrated in the surround.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

Control and monitoring via central 24 V low-power system. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information  
[www.rp-group.com/en/item/KMB519CC](http://www.rp-group.com/en/item/KMB519CC)




## TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP54
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	3
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltageAC	24 V
Power max.	2,1 W
Power maintained	2,1 W



Power non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 38 °C
Depth	250 mm
Width	34 mm
Height	50 mm
Weight	0.44
Weight incl. packaging	0.51
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	220 lm
Customs tariff number	94056120
EAN	4260682157393

## TECHNICAL DRAWING

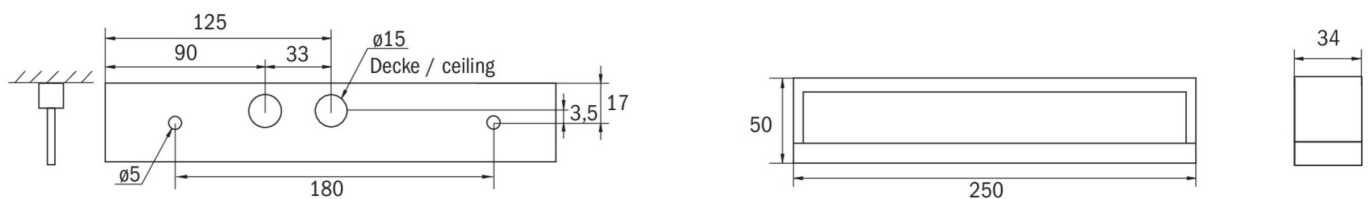


## ACCESSORY LIST

- KME-EB - Mounting frame
- BALL1 - Wire mesh guard
- KMBE - Concrete-mounted box
- BALLPLX-KMB - Wire mesh surround
- KMBFH -



## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KMB019ML-SW		Central power supply (ML)	Central power supply	RAL 9005	€€€	Yes	low	Yes	1,920 per system	central
KMB019ML		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central

As of: 15.04.2025 - Subject to technical changes and errors.