



Exit sign

Art.-No.: KMU011WL-SW-3P

Slim convex exit sign with 3-phase adapter. Planning safety for marking the escape and rescue routes for one- or two-sided lettering is ensured by the tool-free, variable use of the pictograms on site. The pictograms are inserted solvent-free. The pictogram set (right, left, top and bottom arrow) is included as standard.

The pre-assembled 3-phase adapter allows tool-free installation in common 3-phase rails, such as Nordic Aluminium GLOBAL pro (formerly NOKIA) XTS, XTTS and XTSC.

Exit sign according to EN 60598-1, EN 605982-22 and EN 1838.



TECHNICAL DATA


| | |
|---|--------------------------------|
| Luminaire type | Exit sign |
| Mounting | 3-phase rail |
| Viewing distance | 24 m |
| Pictograph | Set |
| Illuminant | LED |
| Colour | RAL 9005 |
| Mechanical rating IP | 43 |
| Impact resistance IK | 3 |
| Protection class | 2 |
| Supply | Single battery |
| Monitoring | Self-Control |
| Operation time | 3 h |
| Battery | 3.2V / 3.3 Ah LiFePO4 |
| Operation mode | maintained/non-maintained mode |
| Input Voltage AC | 230 V |
| Input Frequency Hz | 50 / 60 Hz |
| Input Voltage DC | - V |
| Power consumption max. | 5,3 W |
| Power consumption maintained | 3,9 W |
| Power consumption non-maintained | 1,5 W |
| Ambient temperature maintained mode | -5 °C / 40 °C |
| Ambient temperature non-maintained mode | -5 °C / 40 °C |



| | |
|------------------------------|---------------|
| Length | 34 mm |
| Width | 250 mm |
| Height | 174 mm |
| Weight | 0.45 kg |
| Weight incl. Packaging | 0.62 kg |
| Connection cross-section | 2.5 mm |
| Switching input L' | Yes |
| Emergency light blocking | No |
| Battery connector | Plug |
| Dimming function | No |
| Luminous flux mains mode | 190 lm |
| Luminous flux emergency mode | 190 lm |
| Customs tariff number | 94056120 |
| Coutry of origin | Germany |
| EAN | 4260682152282 |



TECHNICAL DRAWING

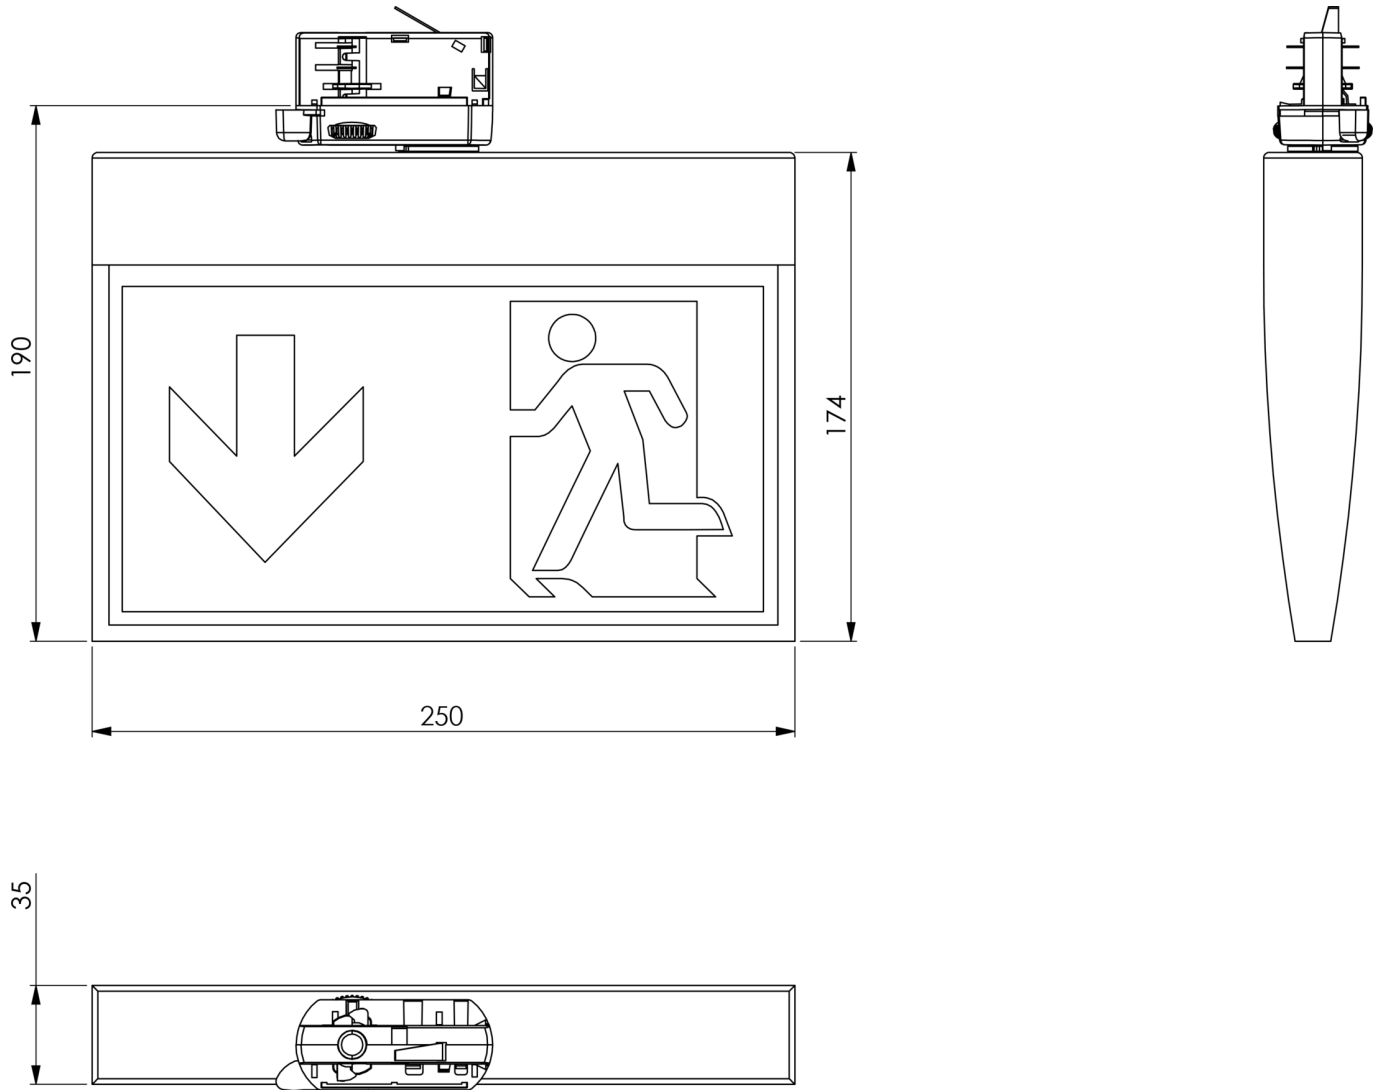

ACCESSORIES

LFP3233.01 - LiFePO4 3,2 V / 3,3 Ah