



## Exit sign

**Art.-No.: KMU013SC-3P**

Slim convex exit sign with 3-phase adapter. Planning safety for marking the escape and rescue routes for one- or two-sided lettering is ensured by the tool-free, variable use of the pictograms on site. The pictograms are inserted solvent-free. The pictogram set (right, left, top and bottom arrow) is included as standard.

The pre-assembled 3-phase adapter allows tool-free installation in common 3-phase rails, such as Nordic Aluminium GLOBAL pro (formerly NOKIA) XTS, XTTS and XTSC.

Exit sign according to EN 60598-1, EN 605982-22 and EN 1838.



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	3-phase rail
Viewing distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Colour	RAL 9003
Mechanical rating IP	43
Impact resistance IK	3
Protection class	2
Supply	Single battery
Monitoring	Self-Control
Operation time	3 h
Battery	3.2V / 3.3 Ah LiFePO4
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	- V
Power consumption max.	4,6 W
Power consumption maintained	3,3 W
Power consumption non-maintained	1 W
Ambient temperature maintained mode	-5 °C / 40 °C



Ambient temperature non-maintained mode	-5 °C / 40 °C
Length	34 mm
Width	250 mm
Height	174 mm
Weight	0.45 kg
Weight incl. Packaging	0.62 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	Plug
Dimming function	No
Luminous flux mains mode	190 lm
Luminous flux emergency mode	190 lm
Customs tariff number	94056120
Country of origin	Germany
EAN	4260682152190



## TECHNICAL DRAWING

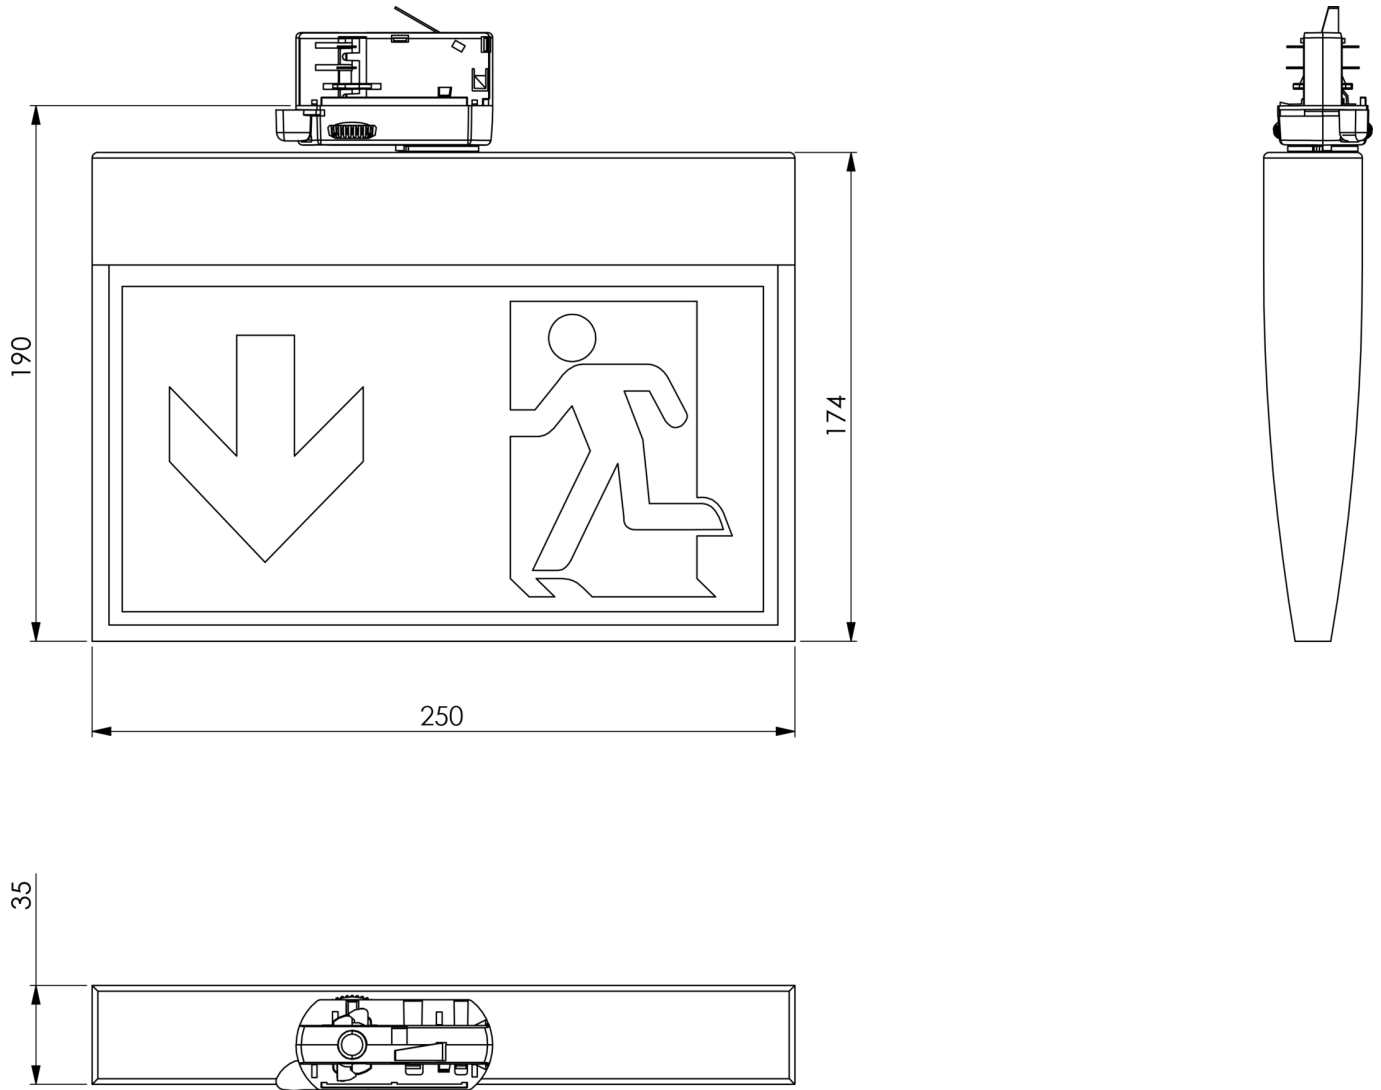

## ACCESSORIES

LFP32057.K - LiFePO4 3,2 V / 0,57 Ah D17 x L52 mm