



## Art.-Nr: KMU013SC Exit sign Single Battery Universal, SelfControl (SC), 3 h, 24 m, IP43, Plastic, white

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.





More information www.rp-group.com/en/item/KMU013SC



#### **TECHNICAL DATA**

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE
Insulation class	2
Supply	Single Battery
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	4,6 W






Power maintained	3,3 W				
Power non-maintained	1 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	34 mm				
Width	250 mm				
Height	174 mm				
Weight	0.45				
Weight incl. packaging	0.55				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	No				
Battery connection	Connector				
Dimming function	No				
Luminous flux mains	190 lm				
Luminous flux emergency	190 lm				
Customs tariff number	94056120				
EAN	4260123690212				





# TECHNICAL DRAWING

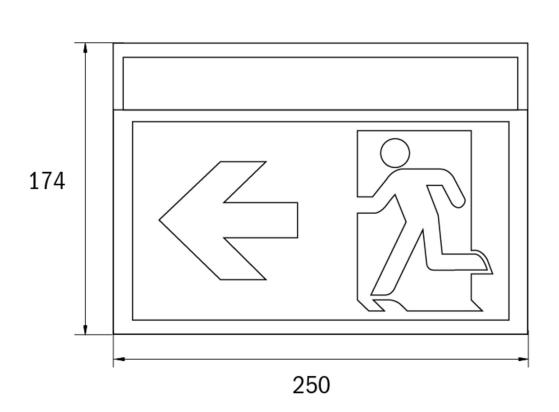



### **ACCESSORY LIST**

DSA - Wire suspension

KME-EB - Mounting frame

AWKSU - Wall bracket

2PW-EB - Pendant

KMBE - Concrete-mounted box

BALLPLX-KMU - Wire mesh surround





## RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KMU003SC	<b>₹</b> →	SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KMU013WB	<b>A</b> >	Wireless Basic (WB)	Single battery	RAL 9003	€€	yes	low	yes	50	central
KMU013WL	<b>₹</b>	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 04.02.2025 - Subject to technical changes and errors.