



## Exit sign/emergency luminaire Art.-No.: KSC013WL

Innovative high-grade LED exit sign and emergency luminaire for universal mounting. This luminaire using only 3 parts has a simple installation. Applicable for maintained or non-maintained operation mode. The tollless change and variable use of the pictograms provide planning security on site. Universal pictogram set (left, right, up, down) included. The KSC luminaire is also designed for illumination of fire fighting and first aid facilities. The equipment of the first aid facilities is lighted by at least 5 lux according to EN 1838. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.




### TECHNICAL DATA

Luminaire type	Exit sign / ER-light
Mounting	Universal
Viewing distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Colour	RAL 9003
Mechanical rating IP	54
Impact resistance IK	≥ 3
Protection class	2
Supply	Single battery
Monitoring	WL - Wireless Professional
Operation time	3 h
Battery	3.2V / 3.3 Ah LiFePO4
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	- V
Power consumption max.	5,3 W
Power consumption maintained	3,9 W
Power consumption non-maintained	1,5 W
Ambient temperature maintained mode	-10 °C / 40 °C



Ambient temperature non-maintained mode	-10 °C / 40 °C
Length	34 mm
Width	250 mm
Height	174 mm
Weight	0.7 kg
Weight incl. Packaging	0.78 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	Plug
Dimming function	No
Luminous flux mains mode	190 lm
Luminous flux emergency mode	190 lm
Customs tariff number	94056120
Coutry of origin	Germany
EAN	4260349824163

## TECHNICAL DRAWING

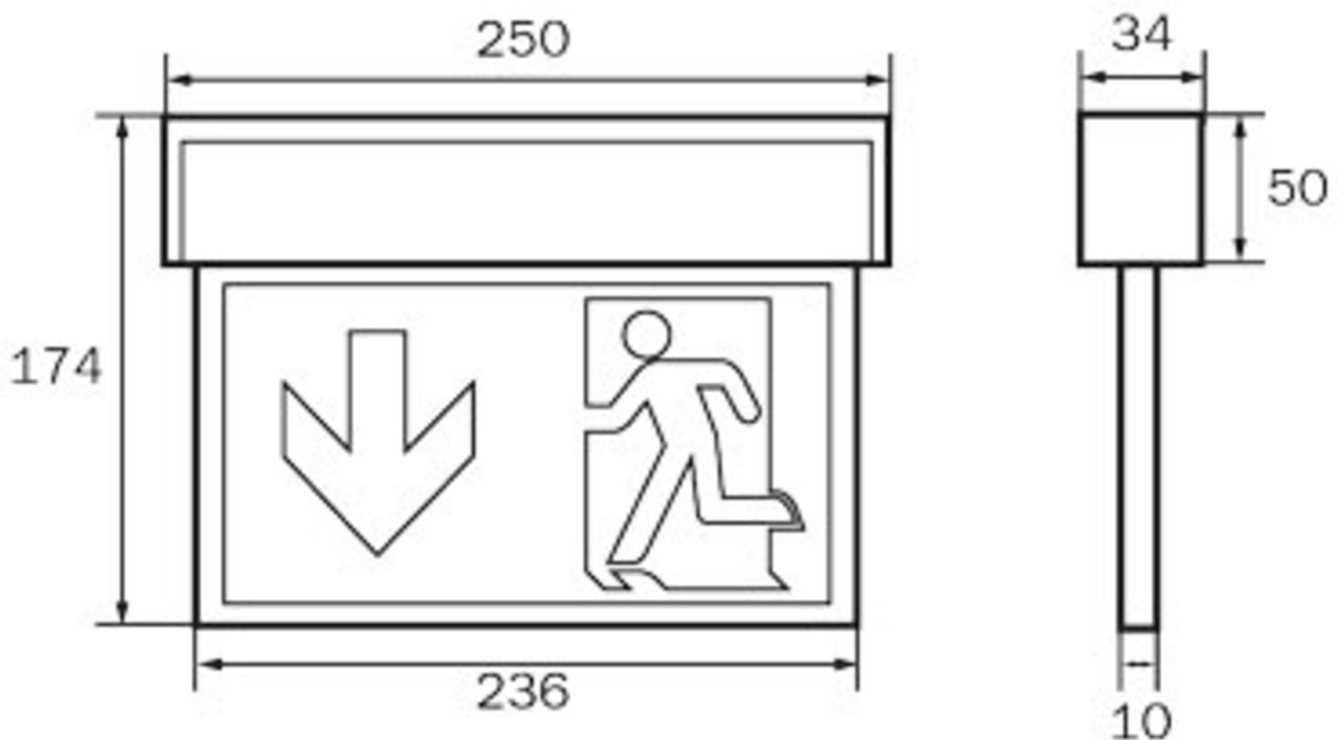



## ACCESSORIES

DSA	- cord suspension set 1,5m
KME	- KM recessed frame without test button (CBS)
AWKSU	- Wall bracket short 60x47mm, white
2PW-EB.1.5M	-
2PW-EB.2M	-
2PW-EB.1M	- 2x PW - Pendant white 1000mm pre-wired
2PW-EB	-